## **Orange Lightning Gloves**



GSA Contract #GS-06F-0043M
BPO# 1002733-V8

## **Description**

Breakthrough 5.5 pH Technology! Made to match healthy skin's natural 5.5 pH levels to ensure the MOST comfortable fit yet!

#### **Features**

- Powder Free Nitrile Glove
- Latex Free
- Textured Grip
- Ambidextrous
- Safety Orange color high visibility
- Unique formulation reduces excess perspiration
- Quadruple washed no excess chemicals lingering on the glove
- Super strength and stretch

#### **Applications**

- Visbility
- Protection

# POWDER FREE NITRILE GLOVES

6 mil thick with pH 5.5 Technology!



AAMPS P/N	CHROMATE P/N	SIZE
5000004664	59207MED	М
5000004665	59207LARGE	L
5000004666	59207XL	XL
5000004667	59207XXL	XXL







# **EPDM Cushioned Cable Clamps**



### Description

These cable clamps are hot-dipped galvanized steel, chemically treated G90. Manufactured from heavier gauges of steel than normally used, and designed to secure and route wire, cable, rigid or flexible tubing and hoses.

The clamping diameter is cushioned with a high quality EPDM extrusion formulated to meet or exceed a variety of industry specifications.

For use on rubber hoses, plastic tubing, electrical cables, welding hoses, and other materials that can be securely fastened.

#### **Features**

- EPDM covered clamps provide a protective shield to prevent cracking and deterioration against weather
- Excellent for use where vibration dampening support is needed
- Softer cushion material provides stronger clamping power (less slippage) than vinyl and nylon clamps
- Hot-dipped galvanized steel
- One round and one slotted hole
- Clamp width: 0.5"
- Mounting hole diameter: 0.281"
- EPDM Color: Black
- Temperature range: -30° to 180° F
- Good resistance to oil and chemicals
- EPDM per SAE J200/ASTM D2000 BC715A
- Chem-treated G90 per ASTM A653/ A653M for corrosion resistance

#### **Application**

• E-60 Air Compressor Piping











AAMPS P/N	110450390X	454120002X	4541200054
CHROMATE P/N	30182	30184	30188
SIZE (I.D.)	1/4"	1/2"	1"
INDUSTRY NO.	4	8	16
MOUNTING HOLE	0.281 / 9/32"	0.281 / 9/32"	0.281 / 9/32"
BAND WIDTH	0.500 / 1/2"	0.500 / 1/2"	0.500 / 1/2"





AANADC DAN

070115



# Sabre/Jig Saw Blade



### **Description**

• Shank: Bosch

• Blade size: 3" length • Teeth per inch: 14

• Dimensions (L x W x T):

3" x 3/8" x 0.35"

#### **Features**

- Bi-metal construction of high cobalt content (8%).
- High speed steel teeth welded to shatter-resistant alloy steel back.
- Bi-metal blades reduce breakage, and last longer than conventional carbon and all high speed steel blades.
- Better shock and heat resistance.

#### **Application**

• Ferrous and non-ferrous metals 1/8" and thicker

# METAL CUTTING!









## Sandwich Eraser Sponge



#### **Description**

Industrial Melamine\* Cleaning Tool
The design is 2 parts melamine foam
(white) and a polyurethane center (blue).


#### **Features**

- The design is 2 parts melamine foam (white) and a polyurethane center (blue)
- Great for use on any water washable surface to remove a variety of soils and stains
- Twice the amount of cleaning surface plus blue durability strip means longer useful life
- Handles a wide range of cleaning tasks eliminating the need for multiple cleaning products
- Great for really tough jobs

## **Applications**

- Tables
- White boards
- Counters
- Walls
- Scuffs on floors
- Scuffs on seats
- Sinks
- Lavatory surfaces
- Tile
- Lighting fixtures
- Light graffiti removal
- Any other surface that needs cleaning including painted surfaces
- \* Melamine material is genuine Basotect®, manufactured by BASF.



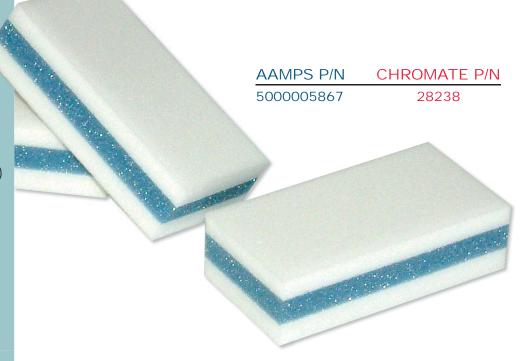







070115

#### **Directions**

- Wet sponge and squeeze out excess water
- · Gently rub dirt, stain or scuff marks
- Rinse eraser sponge with clean water
- Squeeze dry and store
- Dispose when melamine foam sponge is gone
- Each cleaning sponge can be used many times

EASY TO USE! USE ONLY WATER! NO CHEMICALS REQUIRED!





