

Wire Bundling

ASSORTMENT

devices. Constructed of polyethylene hook and nylon loop, laminated back to back, easy to cable and wire. Can be opened and closed numerous times without failure. Safe and easy to install. Ideal for use in tight areas such as telecommunications closets and will not get caught on other cables. Available in 15" and 11" lengths. Category 5e and Category 6 cable or fiber optic cable since it cannot be over-etched, 40 lbs (6", 8", 11") / 50 lbs (15")

PIN 17041

11" x 1/2" / BLACK
P/N 8036

15" x 3/4" / BLACK
P/N 8037

11" x 1/2" / RED
P/N 8042

15" x 3/4" / RED
P/N 8043

11" x 1/2" / ORANGE
P/N 8046

15" x 3/4" / ORANGE
P/N 8047

11" x 1/2" / YELLOW
P/N 8051

15" x 3/4" / YELLOW
P/N 8052

11" x 1/2" / GREEN
P/N 8057

15" x 3/4" / GREEN
P/N 8059

11" x 1/2" / BLUE
P/N 8065

15" x 3/4" / BLUE
P/N 8066

TRAY FRONT

50-A NAIMAN PARKWAY, SOLON, OHIO 44139 • 1-800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com


CHROMATE
INDUSTRIAL CORP.

CIC 200™ Wire Ties


Standard – White

Features

- Superior design and construction
- QPL listed
- UL recognized

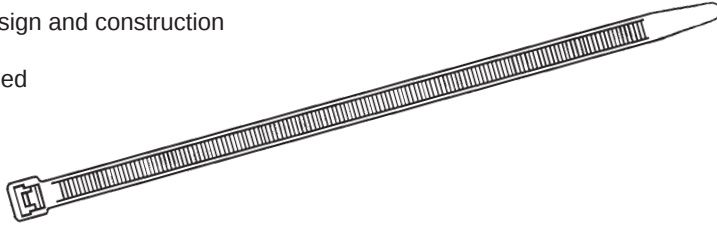

In Tray Assortment – P/N 7732

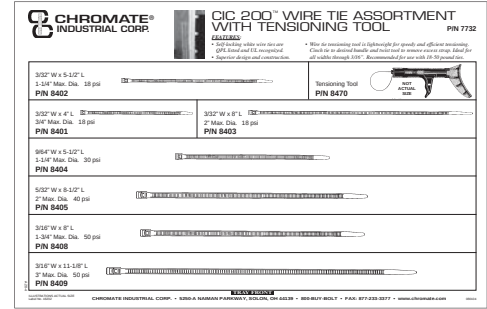


WIDTH	LENGTH	MAX. DIA.	PSI	PART	WIDTH	LENGTH	MAX. DIA.	PSI	P/N
3/32"	4"	3/4"	18	T 8401	3/16"	11-1/8"	3"	50	R 8409
3/32"	5-1/2"	1-1/4"	18	T 8402	3/16"	14-1/8"	4"	50	R 8410
3/32"	8"	2"	18	T 8403	5/16"	8-7/8"	2"	120	N 8411
9/64"	5-1/2"	1-1/4"	30	T 8404	5/16"	14-1/4"	4"	120	N 8413
5/32"	8-1/2"	2"	40	T 8405	11/32"	15"	4"	175	N 8414
5/32"	11-5/8"	3"	40	T 8406	11/32"	24"	6"	175	I 8415
5/32"	14-5/8"	4"	40	R 8407	11/32"	36"	9"	175	I 8416
3/16"	7-1/2"	1-3/4"	50	T 8408	11/32"	42"	12"	175	I 8417

Standard – Colors

Features

- Superior design and construction
- QPL listed
- UL recognized




COLOR	TIE WIDTH	LENGTH	MAX. DIA.	PSI	P/N
Brown	1/8"	8"	2"	40	T 8578
Blue	1/8"	8"	2"	40	T 8579
Purple	1/8"	8"	2"	40	T 8580
Gray	1/8"	8"	2"	40	T 8581
Red	1/8"	8"	2"	40	T 8582


Standard – Fluorescent Colors

Features

- Superior design and construction
- QPL listed
- UL recognized

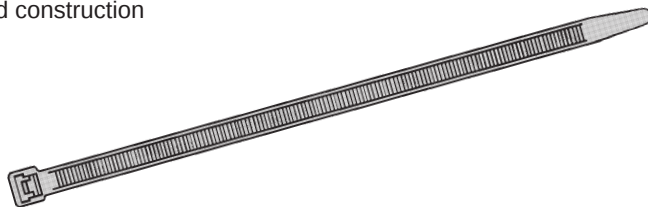

In Tray Assortment – P/N 7799

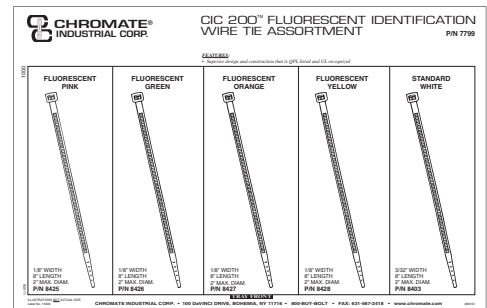

COLOR	WIDTH	LENGTH	MAX. DIA.	PSI	PART	COLOR	WIDTH	LENGTH	MAX. DIA.	PSI	P/N
Pink	1/8"	8"	2"	40	T 8425	Orange	1/8"	8"	2"	40	T 8427
Pink	3/16"	11"	3"	40	T 8586	Orange	3/16"	11"	3"	40	T 8588
Green	1/8"	8"	2"	40	T 8426	Yellow	1/8"	8"	2"	40	T 8428
Green	3/16"	11"	3"	40	T 8589	Yellow	3/16"	11"	3"	40	T 8587
—	—	—	—	—	—	Blue	3/16"	11"	3"	40	T 8412

CIC 200™ Wire Ties


Weather Resistant – Black

Features


- Resistant to solvents, fungus, oil, grease, alkalies, mild acids, ultra-violet rays, etc.
- Meets MIL Specs (3367-1 to 7-0),
- Temperature range: 40° to 185°F



In Tray Assortment – P/N 17013

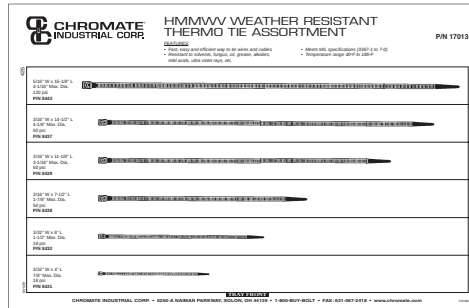

In Tray Assortment – P/N 7733

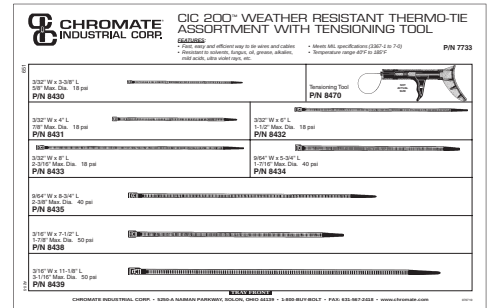


WIDTH	LENGTH	MAX. DIA.	PSI	PART	WIDTH	LENGTH	MAX. DIA.	PSI	P/N
3/32"	4"	5/8"	18	T 8430	3/16"	11-1/8"	3-1/16"	50	R 8439
3/32"	4"	7/8"	18	T 8431	3/16"	14-1/2"	4-1/8"	50	R 8437
3/32"	6"	1-1/2"	18	T 8432	5/16"	15-1/8"	4-1/16"	120	N 8443
3/32"	8"	2-3/16"	18	T 8433	11/32"	25"	7-3/16"	175	I 8445
9/64"	5-3/4"	1-7/16"	40	T 8434	11/32"	36"	11"	175	I 8436
9/64"	8-3/4"	2-3/8"	40	T 8435	17/50"	48"	14-1/2"	175	I 8500
3/16"	7-1/2"	1-7/8"	50	T 8438	—	—	—	—	—

Reusable – Black and White

Features

- Black - Weather resistant
 - Resists corrosion, moisture, abrasion ultra-violet rays
- Self-locking, releasable, durable
- Non-brittle and non-cracking
- Saves money
- Temperature range: 40°F to 185°F

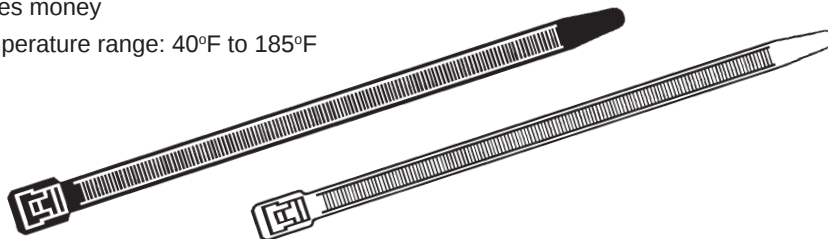

In Tray Assortment – P/N 17968



BLACK – WEATHER RESISTANT					
TIE WIDTH	LENGTH	MAX. DIA.	PSI		P/N
5/16"	6"	1-3/8"	50	R	8452
3/16"	14-1 1/2"	4"	50	N	8595

WHITE					
TIE WIDTH	LENGTH	MAX. DIA.	PSI		P/N
5/32"	6"	1-3/8"	50	R	8451
3/16"	14-1 1/2"	4"	50	R	8598

CIC 200™ Wire Ties

Stainless Steel – Self Locking

Features

- 304 Stainless Steel
- More locking force than conventional ball clamps
 - The locking bar contacts both the top and bottom of the band at the edges, the strongest part of the buckle
- Easy to use – simply insert the tail and tighten
- Minimum loop tensile strength: 150 lbs.
- Width: 3/16" (5 mm)
- Thickness: 0.010" (0.245 mm)
- Can be tightened by hand or with self-locking hand tool

Self-Locking Tool

- Includes adjustable tension and automatic cut-off
- P/N 28080**



LENGTH	MAX. DIA.	P/N	
8.4"	2"	T	8084
14.9"	4"	T	8085
20.9"	6"	T	8086
27.4"	8"	T	8087
33.4"	10"	T	8088

Special Purpose Wire Ties

Standard Mount

- Black – Resists ultra-violet rays
- White - Standard



STANDARD MOUNT							
TIE WIDTH	LENGTH	MAX. DIA.	PSI		WHITE P/N		BLACK UV P/N
3/32"	4-1/4"	3/4"	18	T	8418		-
9/64"	6-1/4"	1-1/4"	30	T	8419	R	8440
3/16"	7-1/2"	1-3/4"	50	T	8420	R	8441
3/16"	16"	4"	50	N	8421		-
5/16"	14"	4"	120	N	8422	N	8442

Push Mount

- Push-fits into any 1/4" diameter hole



PUSH MOUNT					
TIE WIDTH	LENGTH	MAX. DIA.	PSI		P/N
3/16"	8-1/2"	1-3/4"	50	T	8423

Double Loop

- Harnesses 2 cables simultaneously



DOUBLE LOOP					
TIE WIDTH	LENGTH	MAX. DIA.	PSI		P/N
3/16"	8-1/2"	1 st Loop 3/4" 2 nd Loop 3/4"	1 st Loop 50 2 nd Loop 40	R	8424

CIC 200™ Wire Ties

I.D. Wire Ties

Features

- One easy step to identify and bundle items
- Reduce snags while providing support to the bundle
- Material: Natural Nylon 6/6
- Temp Rating: 185°F/85°C
- Pad Size: 0.5" x 1.1"



Certification

- ROHS Compliant
-  (CSA Approved)

TIE WIDTH	LENGTH	MAX. DIA.	TENSILE STRENGTH	P/N
0.187" / 4.749 mm	7.0" / 177.8 mm	1.969" / 50 mm	50 lb. / 222 n	R 8477

Grip Ties

Features


- For wire, cable and cord
- Low profile, one piece fastening devices
- Polyethylene hook and nylon loop, laminated back to back
- Quick release for repetitive access to cable and wire
- Can be opened and closed numerous times without failure

Applications

- Network installations
- Bundling power cords
- Fiber optic cable
- Will not cause damage to Category 5e and Category 6



In Tray Assortment - P/N 17041

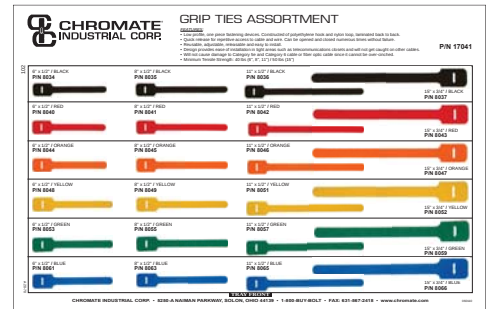

COLOR	TIE WIDTH	LENGTH	MAX. DIA.	MIN. TENSILE STRENGTH	P/N
Black	1/2"	6"	1"	40 lbs	8034
Black	1/2"	8"	1.75"	40 lbs	8035
Black	1/2"	11"	2.63"	40 lbs	8036
Black	3/4"	15"	3.88"	50 lbs	8037
Red	1/2"	6"	1"	40 lbs	8040
Red	1/2"	8"	1.75"	40 lbs	8041
Red	1/2"	11"	2.63"	40 lbs	8042
Red	3/4"	15"	3.88"	50 lbs	8043
Orange	1/2"	6"	1"	40 lbs	8044
Orange	1/2"	8"	1.75"	40 lbs	8045
Orange	1/2"	11"	2.63"	40 lbs	8046
Orange	3/4"	15"	3.88"	50 lbs	8047
Yellow	1/2"	6"	1"	40 lbs	8048
Yellow	1/2"	8"	1.75"	40 lbs	8049
Yellow	1/2"	11"	2.63"	40 lbs	8051
Yellow	3/4"	15"	3.88"	50 lbs	8052
Green	1/2"	6"	1"	40 lbs	8053
Green	1/2"	8"	1.75"	40 lbs	8055
Green	1/2"	11"	2.63"	40 lbs	8057
Green	3/4"	15"	3.88"	50 lbs	8059
Blue	1/2"	6"	1"	40 lbs	8061
Blue	1/2"	8"	1.75"	40 lbs	8063
Blue	1/2"	11"	2.63"	40 lbs	8065
Blue	3/4"	15"	3.88"	50 lbs	8066

Met-Tab™ Wire Ties

Standard, Weather Resistant & Hi-Temperature

Features


- Notchless design eliminates stress areas assuring the strongest possible hold
- Stainless Steel locking device allows infinite adjustability for optimum bundle tightness and ultimate strength
- Smooth molded body will not cut into insulation
- Ribbed and stippled back – wont slip around bundle
- Low profile head – Will not snag in tight clearance applications

Weather Resistant, Black


- Recommended for outdoor use
- Superior ultraviolet resistance and long life

Hi-Temperature

- Heat-Stabilized
- For high, continuous temperature use up to 221°F / 105°C

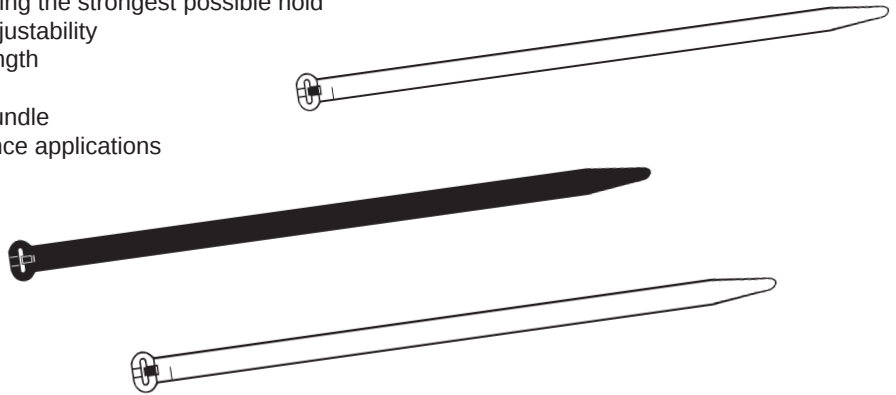

In Tray Assortment - P/N 17755

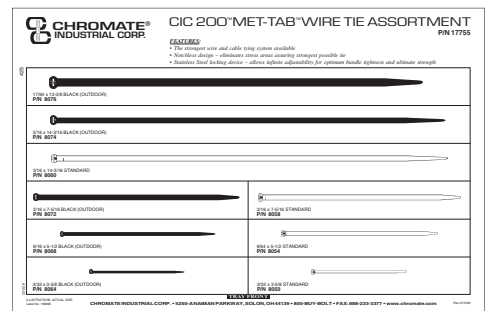

STANDARD – NYLON					
TIE WIDTH	LENGTH	MAX. DIA.	PSI	P/N	
3/32" (.091)	3-5/8"	5/8"	18	T	8050
9/64" (.140)	5-1/2"	1-1/8"	40	T	8054
9/64" (.140)	11-1/16"	3"	40	T	8056
3/16" (.184)	7-5/16"	1-3/4"	50	T	8058
3/16" (.184)	14-3/16"	4"	50	R	8060
17/64" (.270)	13-3/8"	3-1/2"	120	N	8062

WEATHER RESISTANT – BLACK					
TIE WIDTH	LENGTH	MAX. DIA.	PSI	P/N	
3/32" (.091)	3-5/8"	5/8"	18	T	8064
9/64" (.140)	5-1/2"	1-1/8"	40	T	8068
9/64" (.140)	11-1/16"	3"	40	T	8070
3/16" (.184)	7-5/16"	1-3/4"	50	T	8072
3/16" (.184)	14-3/16"	4"	50	R	8074
17/64" (.270)	8"	2"	120	N	8075
17/64" (.270)	13-3/8"	3-1/2"	120	N	8076

HI-TEMPERATURE					
TIE WIDTH	LENGTH	MAX. DIA.	PSI	P/N	
9/64" (.140)	5-1/2"	1-1/8"	30	T	8030
3/16" (.184)	7-5/16"	1-3/4"	50	T	8031
3/16" (.184)	14-3/16"	4"	50	T	8032
17/64" (.270)	13-3/16"	3-1/2"	120	R	8033

Snap-Tie Wire Tie

High Visibility Yellow

Features

- Just one strap to tie and untie
- Fully reusable
- Tail can be tucked away for added safety
- Versatile design allows for multiple applications
- Made of durable nylon 6/6



In Tray Assortment - P/N 17968



TIE WIDTH	LENGTH	MIN. - MAX. DIA.	TENSILE STRENGTH	P/N
1/2"	29-1/2"	3/4" - 8-1/4"	200 lbs.	N 8079

Cobra Cable Ties

UV Black Nylon

Features

- 7-1/2" tie is UL recognized, CSA approved, and Mil-Spec MS3367-23 approved; 11" and 14" tie in process
- Tensile strength 7-1/2" & 11" tie: 50 lbs.
- Tensile strength 14" tie: 120 lbs.
- 100 per pkg
- Reduced head height compared to standard head designs
- Increased safety eliminates snags, cuts, and abrasions to cables, hoses, products, and users
- No exposed sharp edges since the remaining tail slips back into head of tie
- Flexible grooved head design provides maximum strength, while allowing the head to easily flex around the total circumference of tubing or bundled wires
- Tamper Proof Pawl located under the tie's head, makes it inaccessible when bundled
- Designed to work with all tension tools to leave no sharp burrs


Applications

- Wire harnesses
- Control panels
- Marine
- Hoses
- Playgrounds
- Construction
- Safety equipment

P/N 8502 - 7-1/2"

P/N 8503 - 11"

P/N 8504 - 14"

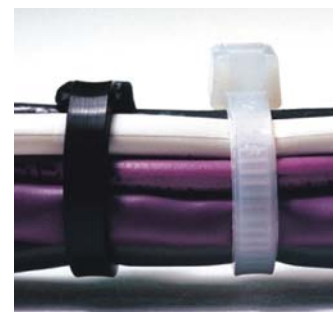


CIC 200™ Superlock Fasteners

Adhesive Backed Self-Mating Strips

Features

- Reclosable, durable construction
- Maintains excellent disengagement strength assuring over 1000 closures
- UV resistant for durability and long life
- Unique mushroom shaped stems – snap together for constant secure reclosable fastening
- Engages to self or use with “Round Self-Mating Superlock Discs”
- High bond strength pressure sensitive adhesive – provides excellent adhesion and resistance to plasticizer migration
- Wide temperature range performance supports static loads from -20°F to 200°F



Applications


- Bare/painted metals, glass, fiberglass, sealed wood, ABS, acrylic, polycarbonate, polystyrene, rigid vinyl, and plasticized vinyl

DESCRIPTION	DISENGAGEMENT STRENGTH	P/N
1" x 6" Superlock Reclosable Fastener (Strips)	38 lbs.	J 2884
1" x 15' Superlock Reclosable Fastener (Roll)	38 lbs.	A 2883

Round Self-Mating Discs

Features

- Rigid polyolefin construction – provides positive locking
- Easily mounted with metal, wood or machine screws
- Maintains excellent disengagement strength – provides over 1000 reclosure cycles



Applications

- For attaching removable decorative panels, cowlings, access panels, etc.

DESCRIPTION	TENSILE STRENGTH	CLEAVAGE STRENGTH	SHEAR STRENGTH	P/N
1-3/16" Diameter Disc	35 lbs.	22 lbs.	4 lbs.	R 2888

SUGGESTED MOUNTING SCREWS	SIZE	P/N
Phillips Binding Head Metal Screw	6 x 1/2	U 1507
	6 x 3/4	U 1509
Slotted Round Head Wood Screw	6 x 1/2	U 8509
	6 x 3/4	U 8511

Superlock Lite Fasteners

Features

- Reusable – can be used again and again
- Saves time and money – easy to install, hook and loop all in one
- Versatile – can be cut to any length
- Secures quickly and easily – remains locked without slipping
- Thickness = 33 mils (0.033")
- Shear strength = 20 psi
- Tensile strength = 40 lbs (1/2" width)
- Temperature range: up to 212°F (100°C)

Applications

- For use on cable and wire assemblies, fiber optic installations or bundling and wrapping of many items



DESCRIPTION	P/N
1/2" x 25 yards	A 32886
1" x 25 yards	A 32887
8" Straps – (3/4" x 25 yards approx. 112 pieces per roll)	A 32888
Dispenser	A 32883




Wire Tie Tools


Wire Tie Tensioning Tool

Features


- Lightweight tool for speedy and efficient tensioning
- Ideal for all tie widths through 3/16"

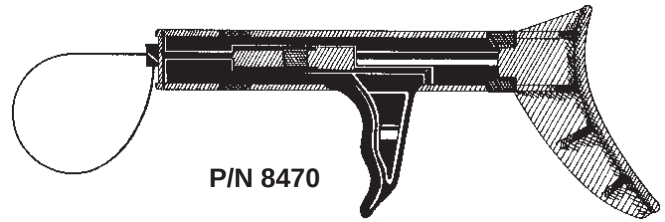

In Tray Assortment - P/N 7732

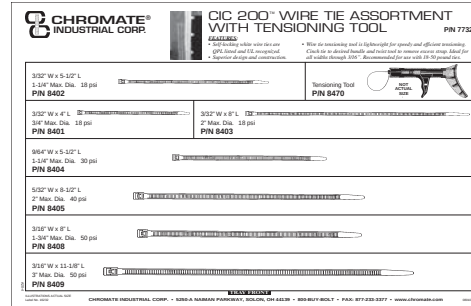

In Tray Assortment - P/N 7733

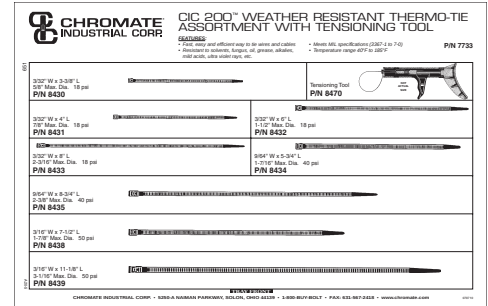


Cable Tie Cutter

Features

- Heat Treated Alloy Steel
- Comfortable and Easy to Use
- Scissor action cutter produces clean cuts
- Works excellent with all cable tie strap widths
- Safety guards prevent the sharp blades from contacting the bundled items

Applications

- Breaking down bundles
- Removing packaged items

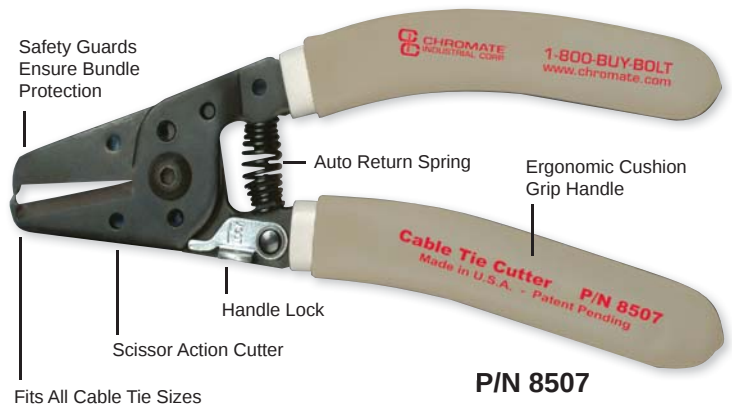


Cable Tie Cutter/Wire Stripper

Features

- Heat treated alloy steel
- Comfortable and easy to use
- Scissor action cutter produces clean cuts
- Works excellent with all cable tie strap widths
- Works excellent with 10 to 22 solid and stranded gauge wire
- Safety guards prevent the sharp blades from contacting the bundled items
- Precision ground stations strip insulation without nicking the finest conductors

Applications

- Breaking down bundles
- Removing packaged items
- Retrofitting and repairing wire harnesses and hose assemblies

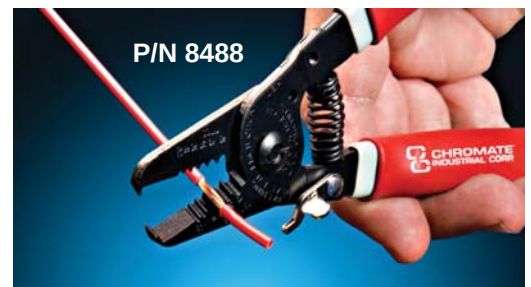


Wire Tie Mounting

Cable Tie Screw Mounts

Features

- Strong, durable and easy to install
- Designed to provide stability to wire bundles
- Can accommodate miniature, intermediate or standard cross-section cable ties
- Each mount is secured with a single #10 screw





DESCRIPTION	LENGTH inch / mm	HEIGHT inch / mm	WIDTH inch / mm	SLOT SIZE inch	P/N
Small Cable Tie Screw Mount – Natural	.605 / 15.400	.265 / 6.700	.380 / 9.600	.160 x .215	T 28463
Small Cable Tie Screw Mount – Black	.605 / 15.400	.265 / 6.700	.380 / 9.600	.160 x .215	T 28465
Large Cable Tie Screw Mount – Natural	.875 / 22.200	.370 / 9.400	.625 / 15.900	.345 x .310	R 28467
Large Cable Tie Screw Mount – Black	.875 / 22.200	.370 / 9.400	.625 / 15.900	.345 x .310	R 28469

Mounting Heads

DESCRIPTION	FITS TIE WIDTHS	P/N
Mounting Head Converts Ties to Mounting Type	3/32" – 3/16"	T 8462
Push-In Cable Tie	3/32" – 3/16"	N 8464




MOUNT-
ING HEAD
CONVERTS
TIES TO
MOUNTING
TYPE



PUSH-IN CABLE TIE

Mounting Bases


DESCRIPTION	FITS TIE WIDTHS	SIZE	P/N (BLACK)	P/N (WHITE)
Cable Tie Mounting Screw Type Base 4-Way – From All 4 Sides	3/32" – 9/64"	3/4"	R 8081*	N 8456*
	3/32" – 3/16"	1-1/8"	–	N 8458
	3/32" – 3/16"	1-1/8"	N 8083*	N 8459*
	3/32" – 3/16"	1-1/2"	L 8093*	N 8466*



*with adhesive backing

Masonry Tie Mounts

MOUNTING	MIN. DEPTH	A	B	C	D	P/N
.188" Hole	.935"	1.185"	.218"	.236"	.390"	N 8080
.312" Hole	1-1/2"	1.715"	.313"	.362"	.500"	N 8082



WEATHER RESISTANT FOR INDOOR OR OUTDOOR USE

Wire and Cable Organizers

Bridge Sleeves

Features

- UV black nylon
- For 120 lb. standard and low ties
- Safely secure wires without pinching or crushing
- Multiple Sleeves on one cable tie allows for multiple wires under a single cable tie, reducing cost, installation time, and location restrictions
- The bridge allows wires to safely pass through while allowing the tie to be cinched tightly
- 100 per pkg.

Applications

- Fiber Optic Cable
- Critical Sensor Wiring
- Soft Insulated Wires
- These items are just a few examples of wires that cannot withstand the crushing force of a cinched cable tie



P/N 8505

Multiple Cable Organizers

Features

- Fast, easy installation with one nail for wood or one screw for metal studs
- Patent pending "snap lock gate" quickly secures all cables without restricting them
- Made of fire-retardant high density polypropylene
- National electrical code 300-4-(D) compliant
- 20 per pkg.

Applications

- NM/Romex, Coaxial, Cat 5 as well as other cable with diameters less than 1/4" (6.3 mm) on a stud for a clean professional installation
- Quickly secures multiple cable runs



Screw Mount



Nail Mount

DESCRIPTION	P/N	DESCRIPTION	P/N
Multiple cable organizer – Screw	A 2966	Multiple cable organizer – Nail	A 2967

Clamps


CIC 200™ Adjustable Cable Clamps

Features


- Adjustable holding power for a wide range of cable diameters
- Provides high resistance to impact, heat and chemicals

Applications

- Secures wires, cables, bundles and harnesses to virtually any surface

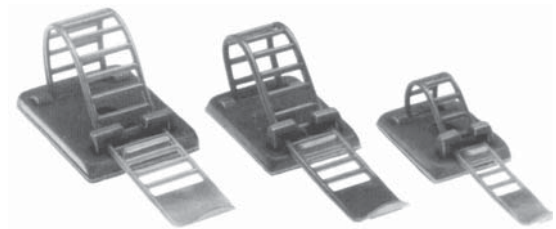

- A. Extremely strong pressure sensitive adhesive for quick and simple installation.
- B. Screw hole offers option for permanent mounting.
- C. Ladder style fastening system allows for instant releasing and pre-fastening.

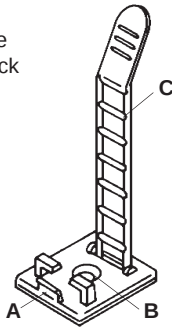

SIZE	Small	Medium	Large
CLAMP RANGE	3/16" - 1/2"	13/64" - 53/64"	9/32" - 63/64"
BASE DIMENSION	45/64" x 63/64"	53/64" x 1-11/64"	63/64" x 1-3/8"
P/N	N 8476	N 8478	N 8480

Vinyl Coated Metal Wire and Cable Clamps

Features

- Provides protection and routing support
- Heavy duty galvanized steel construction
- One oval hole for easy alignment
- 1/32" thick black vinyl cushion
- 3/4" width
- 13/32" hole diameter

Applications

- For wire bundles, cables, tubes and pipes where abrasion, moving parts or heat may exist



In Tray Assortment - P/N 17759



DIAMETER	P/N	DIAMETER	P/N	DIAMETER	P/N
1/4"	N 30153	5/8"	N 30159	1-1/2"	L 30173
5/16"	N 30154	3/4"	N 30161	1-3/4"	L 30177
3/8"	N 30155	1"	L 30165	2"	L 30181
1/2"	N 30157	1-1/4"	L 30169	—	—

Clamps

EPDM Cushioned Cable Clamps

Features

- A protective shield to prevent cracking and deterioration
- For use where vibration dampening support is needed
- Softer cushion material provides stronger clamping power (less slippage) than vinyl and nylon clamps
- Heavy duty galvanized steel
- One round and one slotted hole
- Mounting hole diameter: 9/32" – use 1/4" fastener
- Color: Black
- Temperature range: -50° to 350°F
- Good resistance to oil and chemicals
- EPDM per SAE J200/ASTM D2000



In Tray Assortment – P/N 17017

 CHROMATE INDUSTRIAL CORP.		EPDM COVERED CUSHIONED TUBE CLAMPS ASSORTMENT		P/N 17017
 Tube Clamp 1/2" x 1/2" P/N 30182	 Tube Clamp 1/2" x 3/8" P/N 30183	 Tube Clamp 1/2" x 1" P/N 30186	 Tube Clamp 1/2" x 3/4" P/N 30184	
 Tube Clamp 1/2" x 3/4" P/N 30185	 Tube Clamp 1/2" x 1 1/4" P/N 30189	 Tube Clamp 1/2" x 2" P/N 30192	 Tube Clamp 1/2" x 1 1/2" P/N 30187	
 Tube Clamp 1/2" x 2" P/N 30188	 Tube Clamp 1/2" x 2 1/2" P/N 30191	 Tube Clamp 1/2" x 3" P/N 30194	 Tube Clamp 1/2" x 2 1/2" P/N 30190	
 Tube Clamp 1/2" x 3" P/N 30191	 Tube Clamp 1/2" x 4" P/N 30195	 Tube Clamp 1/2" x 5" P/N 30198	 Tube Clamp 1/2" x 3" P/N 30196	
 Tube Clamp 1/2" x 4" P/N 30195	 Tube Clamp 1/2" x 6" P/N 30199	 Tube Clamp 1/2" x 8" P/N 30202	 Tube Clamp 1/2" x 4" P/N 30200	
 Tube Clamp 1/2" x 6" P/N 30199	 Tube Clamp 1/2" x 8" P/N 30202	 Tube Clamp 1/2" x 10" P/N 30205	 Tube Clamp 1/2" x 6" P/N 30203	


**CHROMATE
INDUSTRIAL CORP.**


CHROMATE INDUSTRIAL CORP. • 8550 S. Midway Parkway, Suite 100 • **PALESTINE, TN 38367** • 800-BUY-BOLT • FAX: 636-967-2435 • www.chromate.com

SIZE – I.D.	INDUSTRY NO.	MOUNTING HOLE	BAND WIDTH	P/N
.1/4"	4	9/32"	1/2"	30182
3/8"	6	9/32"	1/2"	30183
1/2"	8	9/32"	1/2"	30184
5/8"	10	9/32"	1/2"	30185
3/4"	12	9/32"	1/2"	30186
7/8"	14	9/32"	1/2"	30187
1"	16	9/32"	1/2"	30188
1-1/4"	20	9/32"	1/2"	30189
1-1/2"	24	9/32"	1/2"	30190
1-3/4"	28	9/32"	1/2"	30191
2"	32	9/32"	1/2"	30192
2-1/4"	36	9/32"	1/2"	30193
2-1/2"	40	9/32"	1/2"	30194
2-3/4"	44	9/32"	1/2"	30195
3"	48	9/32"	1/2"	30196

Nylon Cable Clamps – Non-Adjustable

Features

- White and black nylon
- Rustproof
- Rotproof
- Weatherproof
- Chemical proof
- Temperature range (continuously): -40° to 185°F
- Temperature range (intermittently): 250°F



In Tray Assortment – P/N 17974

 CHROMATE® INDUSTRIAL CORP.		NYLON CABLE CLAMPS ASSORTMENT		P/N 17974
<u>FEATURES:</u> • Available in standard and heavy duty • Engineering temp. - 40F to 150F continuously, 200F intermittently				
	 1/2" x 1/2" P/N 2976	 1/2" x 3/8" P/N 2977	 1/2" x 3/4" P/N 2981	
	 1/2" x 3/4" P/N 2979	 1/2" x 1" P/N 2980	 1/2" x 1 1/4" P/N 2984	
	 1/2" x 1" P/N 2982	 1/2" x 1 1/2" P/N 2983	 1/2" x 1 1/2" P/N 2986	
	 1/2" x 1 1/2" P/N 2985	 1/2" x 1 3/4" P/N 2987	 1/2" x 1 3/4" P/N 2988	
	 1/2" x 2" P/N 2989	 1/2" x 2 1/2" P/N 2990	 1/2" x 3" P/N 2994	
	 1/2" x 2 1/2" P/N 2991	 1/2" x 3" P/N 2992	 1/2" x 3 1/2" P/N 2995	
	 1/2" x 3" P/N 2993	 1/2" x 3 1/2" P/N 2996	 1/2" x 4" P/N 2997	
	 1/2" x 3 1/2" P/N 2998	 1/2" x 4" P/N 2999	 1/2" x 4 1/2" P/N 3000	
CHROMATE INDUSTRIAL CORP. • 3012A TAMMAM ROAD • NEWTON, MA 02459 • 800/801-5017 • FAX: 617-232-0777 • www.chromate.com				

BLACK					
WIDTH	DIA.	P/N	WIDTH	DIA.	P/N
5/32"	1/8"	T 2602	3/8"	3/8"	T 2614
5/32"	3/16"	T 2604	3/8"	7/16"	T 2616
1/4"	1/4"	T 2608	3/8"	1/2"	T 2618
3/8"	1/4"	T 2610	1/2"	1/2"	R 2640
3/8"	5/16"	T 2612	1/2"	5/8"	R 2642


WHITE					
WIDTH	DIA.	P/N	WIDTH	DIA.	P/N
1/2"	1/8"	T 2976	1/2"	1/2"	T 2985
1/2"	3/16"	T 2977	1/2"	5/8"	R 2993
1/2"	1/4"	T 2978	1/2"	3/4"	R 2994
1/2"	5/16"	T 2979	1/2"	1"	R 2996
1/2"	3/8"	T 2981	1/2"	1-1/4"	R 2998
1/2"	7/16"	T 2983	1/2"	1-1/2"	R 2999

Wire and Cable Protectors

Split Loom Wire Wrap

Features

- Allows quick and easy wire protection
- Keeps wires neat and free from abrasion
- Made from high density polyethylene for durability
- Temperature range: -40°F to 176°F

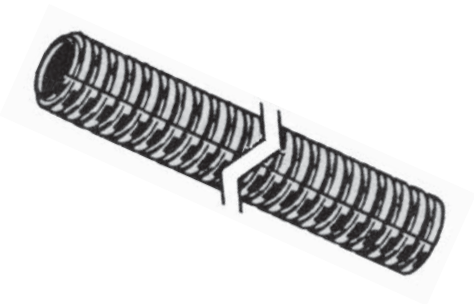

DESCRIPTION	I.D.	P/N	DESCRIPTION	I.D.	P/N
1/4" Split Loom Wire Wrap (100' Roll)	.272"	A 8479	3/4" Split Loom Wire Wrap (50' Roll)	.760"	A 8485
3/8" Split Loom Wire Wrap (100' Roll)	.405"	A 8481	1" Split Loom Wire Wrap (50' Roll)	.915"	A 8487
1/2" Split Loom Wire Wrap (100' Roll)	.505"	A 8483			

Spiral Wire Wrap

Features

- Provides a neat protected bundle
- Allows for flexible routing of wire or cable harnesses
- Twists on quickly and easily and allows lead-outs at any point




DESCRIPTION	O.D.	WALL THICKNESS	MIN./MAX. BUNDLE RANGE	P/N
1/4" Spiral Wire Wrap (100' Roll)	1/4"	.045"	3/16" to 2"	A 8482
3/8" Spiral Wire Wrap (100' Roll)	3/8"	.052"	5/16" to 3"	A 8484
1/2" Spiral Wire Wrap (100' Roll)	1/2"	.062"	3/8" to 4"	A 8486

Wire Identification

Wire Markers

Features

- Preprinted booklet of Tyvek® wire markers with matching terminal markers for easy identification
 - Includes common stud size chart and trade size conductors of conduit or tubing
- Tyvek is a trademark of DuPont or its affiliates.

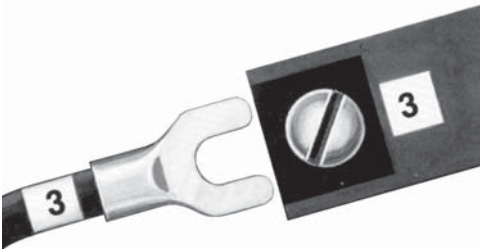

LEGEND	QUANTITY	P/N
0-9	45 each	A 8474

0	0	1	1	2	2	3	3	4	4	5	6	7	8	9
0	0	1	1	2	2	3	3	4	4	5	6	7	8	9
0	0	1	1	2	2	3	3	4	4	5	6	7	8	9
0	0	1	1	2	2	3	3	4	4	5	6	7	8	9
0	0	1	1	2	2	3	3	4	4	5	6	7	8	9
0	0	1	1	2	2	3	3	4	4	5	6	7	8	9
0	0	1	1	2	2	3	3	4	4	5	6	7	8	9

Wire Marker Roll Dispenser

Features

- Compact, convenient refillable marker system
- Pre-cut Tyvek® markers with acrylic adhesive
- 0 - 9 Mini Dispenser
- 76 imprints per number
- Label Size: 0.25" x 1.25"
- 760 imprints total
- ROHS compliant



P/N 8038

- Numeric wire marker roll refill: P/N 8039
- Tyvek is a trademark of DuPont or its affiliates.

When it comes to repairs, quality products make the difference!



CUTTING TOOLS



CHEMICALS



SHOP SUPPLIES



FASTENERS



ELECTRICAL



WELDING



FLEET



HYDRAULICS



FIRST AID/SAFETY

