











NYLON INSULATED DOUBLE GRIP SOLDERLESS TERMINAL ASSORTMENT

P/N 7728

FEATURES:

- Double crimp holds both wire and insulation for added strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation

638

 22-18 x 6 RING CONNECTOR P/N 2002	 16-14 x 8 RING CONNECTOR P/N 2010	 12-10 x 6 RING CONNECTOR P/N 2015	 12-10 x 3/8 RING CONNECTOR P/N 2020	 22-18 BUTT CONNECTOR P/N 2750	
 22-18 x 8 RING CONNECTOR P/N 2003	 16-14 x 10 RING CONNECTOR P/N 2011	 12-10 x 8 RING CONNECTOR P/N 2016	 12-10 x 1/2 RING CONNECTOR P/N 2021	 16-14 BUTT CONNECTOR P/N 2760	
 22-18 x 10 RING CONNECTOR P/N 2004	 16-14 x 1/4 RING CONNECTOR P/N 2012	 12-10 x 10 RING CONNECTOR P/N 2017	 16-14 x 1/4 MALE QUICK SLIDE P/N 2025	 12-10 BUTT CONNECTOR P/N 2770	
 16-14 x 6 RING CONNECTOR P/N 2009	 16-14 x 3/8 RING CONNECTOR P/N 2014	 12-10 x 1/4 RING CONNECTOR P/N 2018	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2035	 DOUBLE MALE QUICK SLIDE ADAPTER P/N 2045	

A20-1

TRAY FRONT

MMS LEVEL "B"

CHROMATE INDUSTRIAL CORP. • 100 DaVINCI DRIVE, BOHEMIA, NY 11716 • 800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

101102



CIC 200™ NYLON INSULATED DOUBLE GRIP TERMINAL ASSORTMENT II

FEATURES:

- Double crimp holds both wire and insulation for added strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation

P/N 7729



 16-14 x 6 RING CONNECTOR P/N 2009	 16-14 x 3/8 RING CONNECTOR P/N 2014	 16-14 x 10 SNAP SPADE P/N 2792	 16-14 x 3/16 FEMALE QUICK SLIDE P/N 2023	 18-14 x 1/4 T-TAP FEMALE QUICK SLIDE CONNECTOR P/N 2043	EXPANSION
 16-14 x 8 RING CONNECTOR P/N 2010	 16-14 x 4 SNAP SPADE P/N 2779	 16-14 x 1/4 SNAP SPADE P/N 2793	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2035	 16-14 x 1/4 FULLY INSULATED FEMALE QUICK SLIDE P/N 2048	EXPANSION
 16-14 x 10 RING CONNECTOR P/N 2011	 16-14 x 6 SNAP SPADE P/N 2790	 16-14 x 2-4-6 MULTI-RING P/N 2722	 16-14 x 3/16 MALE QUICK SLIDE P/N 2738	 16-14 x 1/4 FULLY INSULATED MALE QUICK SLIDE P/N 2058	EXPANSION
 16-14 x 1/4 RING CONNECTOR P/N 2012	 16-14 x 8 SNAP SPADE P/N 2791	 16-14 x 6-8-10 MULTI-RING P/N 2724	 16-14 x 1/4 MALE QUICK SLIDE P/N 2025	 16-14 BUTT CONNECTOR P/N 2760	EXPANSION

TRAY FRONT

CHROMATE INDUSTRIAL CORP. • 5250-A NAIMAN PARKWAY, SOLON, OH 44139 • 1-800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

050113



HIGH TEMPERATURE TERMINAL ASSORTMENT

FEATURES

- Nickel plated alloy steel
- Designed for 900°F (482°C) continuous, 1200°F (649°C) intermittent
- Perfect for ovens, motors, light fixtures or anywhere that other terminals would not corrode

P/N 7730




 22-18 x 6 RING CONNECTOR P/N 2126	 16-14 x 10 RING CONNECTOR P/N 2131	 12-10 x 1/4 RING CONNECTOR P/N 2135	 16-14 x 10 SPADE P/N 2141	 16-14 x 1/4 FEMALE Q.S. RIGHT ANGLE FLAG P/N 2153	EXPANSION
 22-18 x 10 RING CONNECTOR P/N 2127	 16-14 x 1/4 RING CONNECTOR P/N 2132	 12-10 x 3/8 RING CONNECTOR P/N 2136	 12-10 x 10 SPADE P/N 2142	 22-18 BUTT CONNECTOR P/N 2176	EXPANSION
 22-18 x 1/4 RING CONNECTOR P/N 2128	 12-10 x 6 RING CONNECTOR P/N 2133	 22-18 x 6 BLOCK SPADE P/N 2145	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2148	 16-14 BUTT CONNECTOR P/N 2177	EXPANSION
 16-14 x 6 RING CONNECTOR P/N 2130	 12-10 x 10 RING CONNECTOR P/N 2134	 22-18 x 10 SPADE P/N 2140	 16-14 x 1/4 MALE QUICK SLIDE P/N 2152	 12-10 BUTT CONNECTOR P/N 2178	EXPANSION

TRAY FRONT

CHROMATE INDUSTRIAL CORP. • 5250-A NAIMAIN PARKWAY, SOLON, OH 44139 • 1-800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

050113



CIC 200™ WIRE TIE ASSORTMENT WITH TENSIONING TOOL

P/N 7732

FEATURES:

- Self-locking white wire ties are QPL listed and UL recognized.
- Superior design and construction.
- Wire tie tensioning tool is lightweight for speedy and efficient tensioning. Cinch tie to desired bundle and twist tool to remove excess strap. Ideal for all widths through 3/16". Recommended for use with 18-50 pound ties.

3/32" W x 5-1/2" L
1-1/4" Max. Dia. 18 psi
P/N 8402



Tensioning Tool
P/N 8470




NOT
ACTUAL
SIZE


3/32" W x 4" L
3/4" Max. Dia. 18 psi
P/N 8401




3/32" W x 8" L
2" Max. Dia. 18 psi
P/N 8403



9/64" W x 5-1/2" L
1-1/4" Max. Dia. 30 psi
P/N 8404




5/32" W x 8-1/2" L
2" Max. Dia. 40 psi
P/N 8405



3/16" W x 8" L
1-3/4" Max. Dia. 50 psi
P/N 8408



3/16" W x 11-1/8" L
3" Max. Dia. 50 psi
P/N 8409



TRAY FRONT



CIC 200™ WEATHER RESISTANT THERMO TIE ASSORTMENT WITH TENSIONING TOOL P/N 7733

FEATURES:

- Fast, easy and efficient way to tie wires and cables
- Resistant to solvents, fungus, oil, grease, alkalis, mild acids, ultra violet rays, etc.
- Meets MIL specifications (3367-1 to 7-0)
- Temperature range 65°F to 185°F

651

3/32" W x 3-3/8" L
5/8" Max. Dia. 18 psi
P/N 8430



Tensioning Tool
P/N 8470




NOT
ACTUAL
SIZE


3/32" W x 4" L
7/8" Max. Dia. 18 psi
P/N 8431



3/32" W x 6" L
1-1/2" Max. Dia. 18 psi
P/N 8432



3/32" W x 8" L
2-3/16" Max. Dia. 18 psi
P/N 8433



9/64" W x 5-3/4" L
1-7/16" Max. Dia. 40 psi
P/N 8434



9/64" W x 8-3/4" L
2-3/8" Max. Dia. 40 psi
P/N 8435



3/16" W x 7-1/2" L
1-7/8" Max. Dia. 50 psi
P/N 8438



3/16" W x 11-1/8" L
3-1/16" Max. Dia. 50 psi
P/N 8439



TRAY FRONT

A20-5



CIC 200™ PVC INSULATED SOLDERLESS TERMINAL ASSORTMENT

P/N 7727

FEATURES:

- Double crimp holds both wire and insulation for added strength
- Funnel design for fast, positive wire insertion
- High temperature nylon insulation
- One piece, electro-tin plated high conductivity copper construction for maximum corrosion resistance

1000	 22-18 x 6 RING CONNECTOR P/N 2626	 16-14 x 6 RING CONNECTOR P/N 2630	 12-10 x 6 RING CONNECTOR P/N 2635	 12-10 x 1/2 RING CONNECTOR P/N 2639	 22-18 x 1/4 FEMALE QUICK SLIDE P/N 2864	 22-18 BUTT CONNECTOR P/N 2838
	 22-18 x 10 RING CONNECTOR P/N 2627	 16-14 x 10 RING CONNECTOR P/N 2631	 12-10 x 10 RING CONNECTOR P/N 2636	 16-14 x 10 SPADE P/N 2731	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2865	 16-14 BUTT CONNECTOR P/N 2839
	 22-18 x 1/4 RING CONNECTOR P/N 2628	 16-14 x 1/4 RING CONNECTOR P/N 2632	 12-10 x 1/4 RING CONNECTOR P/N 2637	 12-10 x 10 SPADE P/N 2736	 12-10 x 1/4 FEMALE QUICK SLIDE P/N 2866	 12-10 BUTT CONNECTOR P/N 2840
A20-6	 22-18 x 10 SPADE P/N 2727	 16-14 x 3/8 RING CONNECTOR P/N 2633	 12-10 x 3/8 RING CONNECTOR P/N 2638	 22-18 x 1/4 MALE QUICK SLIDE P/N 2867	 16-14 x 1/4 MALE QUICK SLIDE P/N 2868	 12-10 x 1/4 MALE QUICK SLIDE P/N 2869

TRAY FRONT



CIC 200™ SUR-SEAL TERMINAL ASSORTMENT

FEATURES

- Heat shrink tubing and tin plated high conductivity copper connectors are bonded together
- Forms a moisture-proof seal
- Prevents corrosion and voltage drop
- Just crimp and heat

P/N 7777



 RING CONNECTOR 22-18 x 4-6 P/N 2816	 RING CONNECTOR 16-14 x 8-10 P/N 2820	 RING CONNECTOR 12-10 x 8/10 P/N 2824	 SPADE CONNECTOR 22-18 x 8-10 P/N 2828	 BUTT CONNECTOR 20-18 P/N 2841	 FULLY INSULATED FEMALE QUICK SLIDE 16-14 x 1/4 P/N 2845
 RING CONNECTOR 22-18 x 8-10 P/N 2817	 RING CONNECTOR 16-14 x 1/4 P/N 2821	 RING CONNECTOR 12-10 x 1/4 P/N 2825	 SPADE CONNECTOR 16-14 x 4-6 P/N 2829	 BUTT CONNECTOR 16-14 P/N 2842	 FULLY INSULATED MALE QUICK SLIDE 22-18 x 1/4 P/N 2846
 RING CONNECTOR 22-18 x 1/4 P/N 2818	 RING CONNECTOR 16-14 x 5/16 P/N 2822	 RING CONNECTOR 12-10 x 3/8 P/N 2826	 SPADE CONNECTOR 16-14 x 8-10 P/N 2830	 BUTT CONNECTOR 12-10 P/N 2843	 FULLY INSULATED FEMALE QUICK SLIDE 22-18 x 1/4 P/N 2847
 RING CONNECTOR 16-14 x 4-6 P/N 2819	 RING CONNECTOR 16-14 x 3/8 P/N 2823	 RING CONNECTOR 12-10 x 1/2 P/N 2827	 SPADE CONNECTOR 12-10 x 8-10 P/N 2831	 FULLY INSULATED MALE QUICK SLIDE 16-14 x 1/4 P/N 2844	EXPANSION

TRAY FRONT

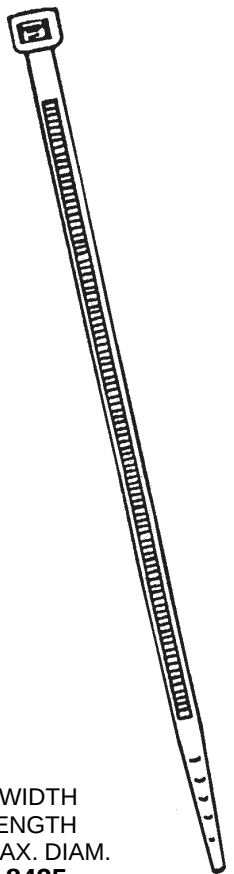
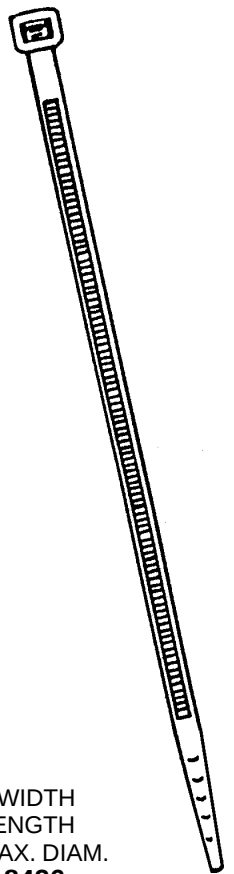
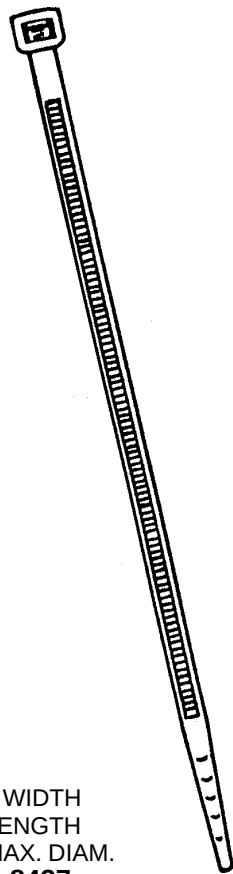
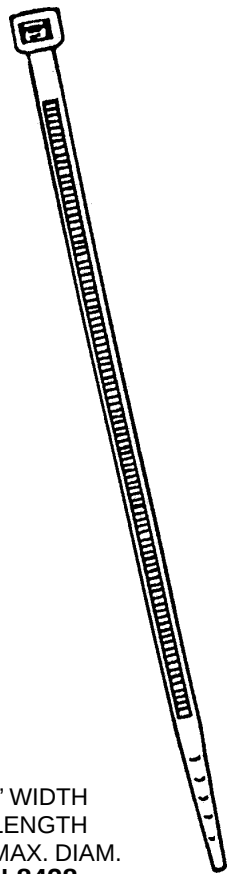
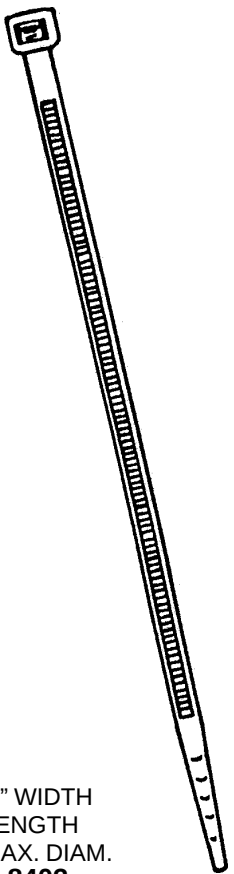


CIC 200™ FLUORESCENT IDENTIFICATION WIRE TIE ASSORTMENT

P/N 7799

FEATURES:

- Superior design and construction that is QPL listed and UL recognized

1000	FLUORESCENT PINK  1/8" WIDTH 8" LENGTH 2" MAX. DIAM. P/N 8425	FLUORESCENT GREEN  1/8" WIDTH 8" LENGTH 2" MAX. DIAM. P/N 8426	FLUORESCENT ORANGE  1/8" WIDTH 8" LENGTH 2" MAX. DIAM. P/N 8427	FLUORESCENT YELLOW  1/8" WIDTH 8" LENGTH 2" MAX. DIAM. P/N 8428	STANDARD WHITE  3/32" WIDTH 8" LENGTH 2" MAX. DIAM. P/N 8403
------	--	---	---	--	---

A20-11

TRAY FRONT

MMS LEVEL "C"

CHROMATE INDUSTRIAL CORP. • 100 DaVINCI DRIVE, BOHEMIA, NY 11716 • 800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

080101




CIC 200™ POZI-LOK AND TWIST-LOK WIRE NUT ASSORTMENT

P/N 7764




FEATURES:


- No more twisted wires to loosen
- Neat connections even in tight places
- Color coded to insure identification
- Special design provides sure connection every time by hand – No tools required
- UL listed for solid copper to copper wires only
- Temperature: rated at 105°C maximum
- Unique spiral spring configuration automatically threads and twists wires together for a perfect connection every time




POZI-LOK WIRE CONNECTOR
22-12 YELLOW
P/N 2861



POZI-LOK CONNECTOR
14-6 BLUE
P/N 2863



POZI-LOK CONNECTOR
22-10 RED
P/N 2862



POZI-LOK B.G.R. GROUND NUT
14-10 GREEN
P/N 2859



TWIST-LOK CONNECTOR
22-16 GRAY
P/N 2801



TWIST-LOK CONNECTOR
22-14 BLUE
P/N 2803



TWIST-LOK CONNECTOR
22-14 ORANGE
P/N 2805



SPIN TWIST WIRE CONNECTOR
P/N 2856



LINERLESS TAPE
3/4 x 180
P/N 2891



TRAY FRONT




CIC 200™ WATERPROOF CONNECTOR ASSORTMENT


P/N 17721

FEATURES:


- Pre-filled with silicone for a completely water-tight, air-tight connection
- One-step installation saves money and labor
- Custom silicone sealant provides ultimate insulation and is impervious to air and moisture
- Ribbed housings and large wings for easy twist-on installation
- U.L. listed and CSA approved for pressure-type applications, 486°C




#1 WATERPROOF CONNECTOR
MIN: 3 #22 MAX: 2 #16
GRAY
P/N 2525




#2 WATERPROOF CONNECTOR
MIN: 3 #20 MAX: 3 #16
BLUE
P/N 2526




#6 WATERPROOF CONNECTOR
MIN: 3 #22 MAX: 4 #12 OR 3 #10
BLUE
P/N 2530



#9 WATERPROOF CONNECTOR
MIN: 2 #10 SOL MAX: 2 #6
BLUE
P/N 2531



#4 WATERPROOF CONNECTOR
MIN: 4 #18 MAX: 2 #12
YELLOW
P/N 2528



#5 WATERPROOF CONNECTOR
MIN: 2 #14 MAX: 4 #12
RED
P/N 2529




CIC 200™ “SUR-SEAL” COLOR HEAT SHRINK TUBING ASSORTMENT

P/N 17725

FEATURES:


- Dual wall flexible color-keyed polyolefin tubing with thick wall adhesive
- Color-keyed for easy identification of wire size
- Operating temperature range is -67°F (-55°C) to 230°F (110°C)
- Recommended in applications requiring moisture protection or waterproofing
- Shrink temperature is 239°F (115°C)

1/8" x 12" BROWN
P/N 6090




3/16" x 12" GRAY
P/N 6091

1/4" x 12" WHITE
P/N 6092



3/8" x 12" RED
P/N 6093



1/2" x 12" BLUE
P/N 6094



3/4" x 12" YELLOW
P/N 6095



1" x 12" BLACK
P/N 6096



TRAY FRONT



CIC 200™ SUR-SEAL SOLDER LINK TERMINALS ASSORTMENT

P/N 17729

FEATURES:

- Heat shrink tubing and tin plated high conductivity copper connectors are bonded together to form a moisture-proof seal, preventing corrosion and voltage drop
- Superior protection for splices exposed to the elements
- Adhesive heat shrink tubing provides a high strength, water-tight seal
- Flux coated low heat solder preform for ultimate strength and conductivity

 RED BUTT 18-20 P/N 2160	 BLUE BUTT 14-16 P/N 2161	 YELLOW BUTT 10-12 P/N 2162	 RED RING 18-20 #6 P/N 2154	 RED RING 18-20 #8 P/N 2155	 RED RING 18-20 #10 P/N 2156
 RED RING 18-20 1/4 P/N 2157	 RED SPADE 18-20 #10 P/N 2169	 BLUE RING 14-16 #8 P/N 2158	 BLUE RING 14-16 #10 P/N 2159	 BLUE RING 14-16 1/4 P/N 2163	 BLUE RING 14-16 3/8 P/N 2164
 BLUE SPADE 14-16 #10 P/N 2170	 YELLOW RING 10-12 #10 P/N 2165	 YELLOW RING 10-12 1/4 P/N 2166	 YELLOW RING 10-12 3/8 P/N 2167	 YELLOW RING 10-12 1/2 P/N 2168	 YELLOW SPADE 10-12 #10 P/N 2171
EXPANSION	EXPANSION	EXPANSION	EXPANSION	EXPANSION	EXPANSION

TRAY FRONT









NYLON INSULATED DOUBLE GRIP SOLDERLESS TERMINAL STARTER ASSORTMENT

P/N 17710

FEATURES:

- Double crimp holds both wire and insulation for added strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation

 22-18 x 6 RING CONNECTOR P/N 2002	 16-14 x 6 RING CONNECTOR P/N 2009	 12-10 x 6 RING CONNECTOR P/N 2015	 12-10 x 1/2 RING CONNECTOR P/N 2021	 22-18 x 1/4 FEMALE QUICK SLIDE P/N 2024	 22-18 BUTT CONNECTOR P/N 2070
 22-18 x 10 RING CONNECTOR P/N 2004	 16-14 x 10 RING CONNECTOR P/N 2011	 12-10 x 10 RING CONNECTOR P/N 2017	 16-14 x 10 SPADE P/N 2111	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2035	 16-14 BUTT CONNECTOR P/N 2070
 22-18 x 1/4 RING CONNECTOR P/N 2005	 16-14 x 1/4 RING CONNECTOR P/N 2012	 12-10 x 1/4 RING CONNECTOR P/N 2018	 12-10 x 10 SPADE P/N 2117	 12-10 x 1/4 FEMALE QUICK SLIDE P/N 2036	 12-10 BUTT CONNECTOR P/N 2070
 22-18 x 10 SPADE P/N 2104	 16-14 x 3/8 RING CONNECTOR P/N 2014	 12-10 x 3/8 RING CONNECTOR P/N 2020	 22-18 x 1/4 MALE QUICK SLIDE P/N 2054	 16-14 x 1/4 MALE QUICK SLIDE P/N 2025	 12-10 x 1/4 MALE QUICK SLIDE P/N 2074

TRAY FRONT











GLASS TUBE AND BLADE FUSE ASSORTMENT

P/N 17737

FEATURES:

- Quality fuses provide safety and reliability by preventing short-circuits and overloads that can cause fires and property damage

345

					
SFE - 4 P/N 2914	SFE - 7-1/2 P/N 2916	SFE - 9 P/N 2917	SFE - 14 P/N 2918	SFE - 20 P/N 2919	SFE - 30 P/N 2920
					
AGC - 1 P/N 2930	AGC - 2 P/N 2935	AGC - 3 P/N 2939	AGC - 4 P/N 2940	AGC - 5 P/N 2941	AGC - 10 P/N 2948
					
AGC - 15 P/N 2951	AGC - 20 P/N 2952	AGC - 25 P/N 2953	AGC - 30 P/N 2954	ATC - 5 P/N 2902	ATC - 10 P/N 2904
					
ATC - 15 P/N 2905	ATC - 20 P/N 2906	ATC - 25 P/N 2907	ATC - 30 P/N 2908	MALE FUSE CLIP ADAPTER GLASS FUSE 25/32 LONG P/N 2800	MALE FUSE CLIP ADAPTER BLADE FUSE 1-1/8 LONG P/N 2802

TRAY FRONT

A20-17




CIC 200™ BATTERY TERMINAL ASSORTMENT

4GA TO 4/0

P/N 17752


FEATURES:

- Easily identified, electro-tin plated copper connector provides high conductivity and resists corrosion
- Easy to crimp




05


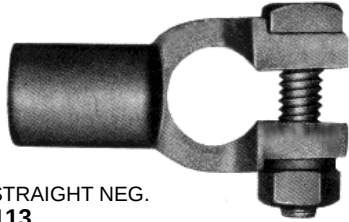
1+2 GA STRAIGHT NEG.
P/N 32113



2/0 STRAIGHT NEG.
P/N 32117

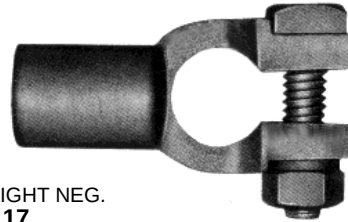


4/0 STRAIGHT NEG.
P/N 32121

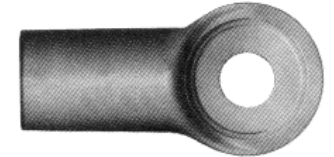


4 GA ST/SM STRAIGHT UNIV.
P/N 32155

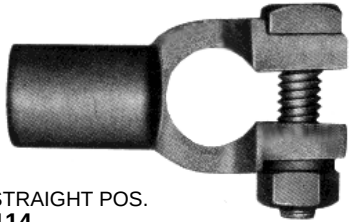
1+2 GA STRAIGHT POS.
P/N 32114



2/0 STRAIGHT POS.
P/N 32118




4/0 STRAIGHT POS.
P/N 32122




3/8 STUD NUT
P/N 32165

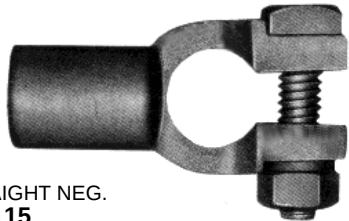
1/0 STRAIGHT NEG.
P/N 32115



3/0 STRAIGHT NEG.
P/N 32119

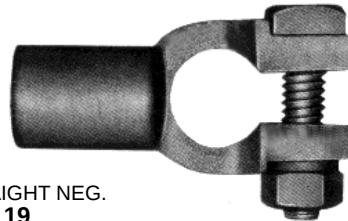


4 GA STRAIGHT UNIV.
P/N 32110

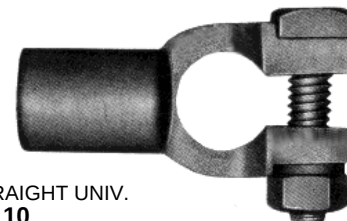


3/8 S.M. BOLT
P/N 32166

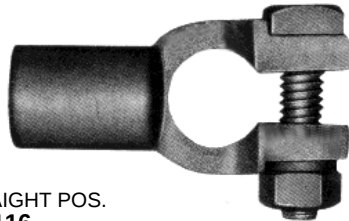1/0 STRAIGHT POS.
P/N 32116



3/0 STRAIGHT POS.
P/N 32120

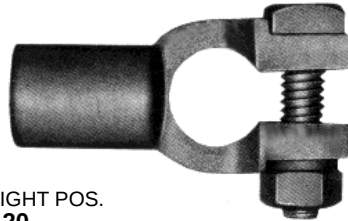

5/16 x 1-3/8 BATTERY BOLT w/ NUT
P/N 2855



A20-19



CIC 200™ THICK WALL SHRINK TUBING ASSORTMENT

P/N 17753

FEATURES:

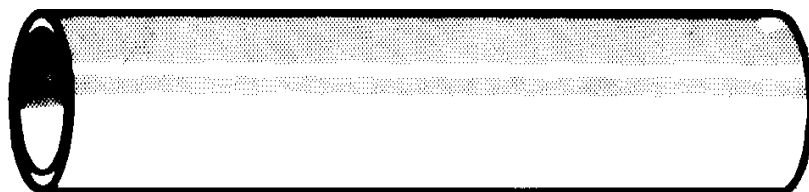
- Heat shrink tubing
- Waterproof, insulates and protects against oxidation and corrosion in electrical splices, connections and terminations
- Sealant locks out corrosion causing elements
- Temperature required to shrink: 115°C/239°F
- Continuous operating temperature: 90°C/194°F
- Dielectric strength 600 volts



TUBING/HOSE CUTTER TO 2" DIA.
P/N 54505




8-2 GA SUR-SEAL HEAT SHRINK TUBING
3 TO 1 SHRINK RATIO
P/N 2875




2 GA - 4/0 THICK WALL HEAT SHRINK TUBING - RED
3 TO 1 SHRINK RATIO
P/N 32180



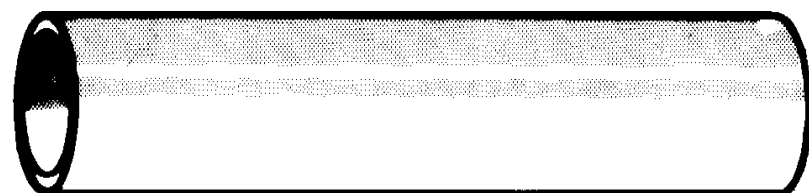6-1 GA - THICK WALL HEAT SHRINK TUBING - RED
3 TO 1 SHRINK RATIO
P/N 32172



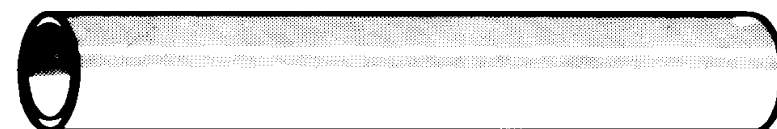2 GA - 4/0 THICK WALL HEAT SHRINK TUBING - BLACK
3 TO 1 SHRINK RATIO
P/N 32178



6-1 GA - THICK WALL HEAT SHRINK TUBING - BLACK
3 TO 1 SHRINK RATIO
P/N 32174



CIC 200™ SOLDER-LINK SLUG ASSORTMENT

FEATURES:

- CIC 200 Solder Link Slugs and Sur-Seal tubing provides the fastest, easiest, hermetically sealed battery connections possible – far superior to crimping
- Cost efficient – no expensive tools required
- Pre-measured – provides the exact amount of solder for each size connector

- Available in 7 sizes – 4 gauge to 4/0
- Color coded – coincides with industry standards
- Provides the perfect connection every time – complete and environmentally sealed

P/N 17751

241



GRAY



PINK



ORANGE



YELLOW

4 GA SLUG
P/N 6270

1 GA SLUG
P/N 6272

2/0 SLUG
P/N 6274

4/0 SLUG
P/N 6276



GREEN



BLACK



PURPLE

2 GA SLUG
P/N 6271

1/0 SLUG
P/N 6273

3/0 SLUG
P/N 6275

SOLDER-LINK™ FLUX
P/N 74518



A20-21



CIC 200™ MET-TAB™ WIRE TIE ASSORTMENT

FEATURES:

- The strongest wire and cable tying system available
- Notchless design – eliminates stress areas assuring strongest possible tie
- Stainless Steel locking device – allows infinite adjustability for optimum bundle tightness and ultimate strength

P/N 17755




425



17/64 x 13-3/8 BLACK (OUTDOOR)
P/N 8076




3/16 x 14-3/16 BLACK (OUTDOOR)
P/N 8074



3/16 x 14-3/16 STANDARD
P/N 8060




3/16 x 7-5/16 BLACK (OUTDOOR)
P/N 8072



3/16 x 7-5/16 STANDARD
P/N 8058




9/16 x 5-1/2 BLACK (OUTDOOR)
P/N 8068



9/64 x 5-1/2 STANDARD
P/N 8054



3/32 x 3-5/8 BLACK (OUTDOOR)
P/N 8064



3/32 x 3-5/8 STANDARD
P/N 8050



TRAY FRONT

A20-22



CIC 200™ VINYL COATED TUBE AND HOSE CLAMP ASSORTMENT

P/N 17759

FEATURES:

- Vinyl coated metal tube and hose clamps
- Provides protection and routing support for tubes, pipes, wire bundles and cables where abrasion, moving parts or heat may exist
- One oval hole for easy alignment
- 1/32" thick black vinyl cushion
- 3/4" width and 13/32" hole diameter



1/4" TUBE/HOSE SIZE
P/N 30153



1/2" TUBE/HOSE SIZE
P/N 30157



3/4" TUBE/HOSE SIZE
P/N 30161



1-1/4" TUBE/HOSE SIZE
P/N 30169



3/8" TUBE/HOSE SIZE
P/N 30155



5/8" TUBE/HOSE SIZE
P/N 30159



1" TUBE/HOSE SIZE
P/N 30165



1-1/2" TUBE/HOSE SIZE
P/N 30173


























CIC 200™ TIME DELAY FUSE ASSORTMENT 1/4 to 30 AMP

P/N 17760

FEATURES:

- Quality fuses provide safety and reliability by preventing short-circuits and overloads that can cause fires and property damage
- Time delay
- Construction: glass tube albaloy plated brass end caps

158

 MDL 1/4 P/N 29009	 MDL 1-1/2 P/N 29021	 MDL 4 P/N 29031	 MDL 7 P/N 29035	 MDL 12 P/N 29040	 MDL 30 P/N 29044
 MDL 1/2 P/N 29013	 MDL 2 P/N 29024	 MDL 5 P/N 29032	 MDL 7-1/2 P/N 29036	 MDL 15 P/N 29041	 GLASS FUSE CLIP ADAPTER P/N 2800
 MDL 3/4 P/N 29016	 MDL-2-1/2 P/N 29026	 MDL 6 P/N 29033	 MDL 8 P/N 29037	 MDL 20 P/N 29042	 FUSE HOLDER P/N 2912 (NOT ACTUAL SIZE)
 MDL 1 P/N 29018	 MDL 3 P/N 29028	 MDL 6-1/4 P/N 29034	 MDL 10 P/N 29039	 MDL 25 P/N 29043	 FUSE PULLER P/N 2969 (NOT ACTUAL SIZE)


TRAY FRONT

ELECTRICAL TAPE ASSORTMENT


P/N 17772

FEATURES:


- Ideal for color-coding all wiring and connections
- Excellent for elongation, flexibility and strength
- Flame retardant
- UL Listed




3/4 x 66'
ELECTRICAL TAPE - BLUE
P/N 2190




3/4 x 66'
ELECTRICAL TAPE - GREEN
P/N 2193



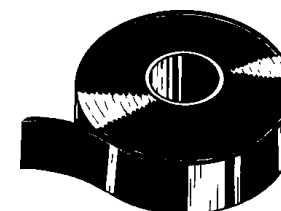3/4 x 66'
ELECTRICAL TAPE - WHITE
P/N 2197




3/4 x 15'
LINERLESS SPLICING TAPE
P/N 2891




3/4 x 66'
ELECTRICAL TAPE - BROWN
P/N 2191




3/4 x 66'
ELECTRICAL TAPE - ORANGE
P/N 2194




3/4 x 66'
ELECTRICAL TAPE - YELLOW
P/N 2198




1 x 36'
FUSION SEAL ELEC. WRAP - RED
P/N 2899



3/4 x 66'
ELECTRICAL TAPE - GRAY
P/N 2192



3/4 x 66'
ELECTRICAL TAPE - RED
P/N 2195



3/4 x 60'
ELECTRICAL TAPE - BLACK
P/N 2199

TRAY FRONT










YELLOW 12-10 TERMINAL ASSORTMENT

P/N 17845

FEATURES:

- Double crimp holds both wire & insulation for superior strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation
- One piece, electro-tin plated high-conductivity copper construction for maximum corrosion resistance
- Crimp guides for accurate crimping

12-10 x 6 Double Grip Nylon Ring P/N 2015 	12-10 x 5/16 Double Grip Nylon Ring P/N 2019 	12-10 x 6 Double Grip Nylon Spade P/N 2115 	12-10 x 8 Double Grip Nylon Hook P/N 2216 	12-10 x 1/4 Double Grip Nylon Female Quick Slide P/N 2036 	12-10 Double Grip Nylon Butt Connector P/N 2770 
12-10 x 8 Double Grip Nylon Ring P/N 2016 	12-10 x 3/8 Double Grip Nylon Ring P/N 2020 	12-10 x 8 Double Grip Nylon Spade P/N 2116 	12-10 x 10 Double Grip Nylon Hook P/N 2217 	12-10 x 1/4 Double Grip Nylon Male Quick Slide P/N 2748 	12-10 Single Grip Nylon Butt Connector P/N 2070 
12-10 x 10 Double Grip Nylon Ring P/N 2017 	12-10 x 1/2 Double Grip Nylon Ring P/N 2021 	12-10 x 10 Double Grip Nylon Spade P/N 2117 	12-10 x 10 Double Grip Nylon Snap Spade P/N 2798 	12-10 x 1/4 Double Grip Nylon Fully Insulated Female Quick Slide P/N 2044 	12-10 Moisture Resistant Butt Connector P/N 2061 
12-10 x 1/4 Double Grip Nylon Ring P/N 2018 	12-10 x 6-8 Double Grip Nylon Multi Ring P/N 2725 	12-10 x 6 Double Grip Nylon Hook P/N 2215 	12-10 x 1/4 Double Grip Nylon Snap Spade P/N 2799 	12-10 x 1/4 Double Grip Nylon Fully Insulated Male Quick Slide P/N 2076 	12-10 Fully Insulated Nylon Female Flag Quick Slide P/N 2049 

TRAY FRONT

BLUE 16-14 TERMINAL ASSORTMENT

P/N 17846
FEATURES:

- Double crimp holds both wire & insulation for superior strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation
- One piece, electro-tin plated high-conductivity copper construction for maximum corrosion resistance
- Crimp guides for accurate crimping

16-14 x 6 Double Grip Nylon Ring P/N 2009	16-14 x 5/16 Double Grip Nylon Ring P/N 2013	16-14 x 10 Double Grip Nylon Hook P/N 2211	16-14 Double Grip Nylon Butt Connector P/N 2760	16-14 x 3/16 Double Grip Nylon Female Quick Slide P/N 2023	16-14 x 3/16 Double Grip Nylon Fully Insulated Female Quick Slide P/N 2047
16-14 x 8 Double Grip Nylon Ring P/N 2010	16-14 x 3/8 Double Grip Nylon Ring P/N 2014	16-14 x 6 Double Grip Nylon Spade P/N 2109	16-14 Single Grip Nylon Butt Connector P/N 2060	16-14 x 1/4 Double Grip Nylon Female Quick Slide P/N 2035	16-14 x 1/4 Double Grip Nylon Fully Insulated Female Quick Slide P/N 2048
16-14 x 10 Double Grip Nylon Ring P/N 2011	16-14 x 6 Double Grip Nylon Hook P/N 2209	16-14 x 8 Double Grip Nylon Spade P/N 2110	16-14 Moisture Resistant Butt Connector P/N 2062	16-14 x 3/16 Double Grip Nylon Male Quick Slide P/N 2738	16-14 x 3/16 Double Grip Nylon Fully Insulated Male Quick Slide P/N 2074
16-14 x 1/4 Double Grip Nylon Ring P/N 2012	16-14 x 8 Double Grip Nylon Hook P/N 2210	16-14 x 10 Double Grip Nylon Spade P/N 2111	16-14 x 1/8 Double Grip Nylon Female Quick Slide P/N 2022	14-16 x 1/4 Double Grip Nylon Male Quick Slide P/N 2025	16-14 x 1/4 Double Grip Nylon Fully Insulated Male Quick Slide P/N 2058

TRAY FRONT

RED 22-18 TERMINAL ASSORTMENT

P/N 17847

FEATURES:

- Double crimp holds both wire & insulation for superior strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation
- One piece, electro-tin plated high-conductivity copper construction for maximum corrosion resistance
- Crimp guides for accurate crimping

22-18 x 4 Double Grip Nylon Ring P/N 2001	22-18 x 5/16 Double Grip Nylon Ring P/N 2006	22-18 x 10 Double Grip Nylon Hook P/N 2204	22-18 Double Grip Nylon Butt Connector P/N 2750	22-18 x 3/16 Double Grip Nylon Female Quick Slide P/N 2031	22-18 x 3/16 Double Grip Nylon Fully Insulated Female Quick Slide P/N 2041
22-18 x 6 Double Grip Nylon Ring P/N 2002	22-18 x 3/8 Double Grip Nylon Ring P/N 2007	22-18 x 6 Double Grip Nylon Spade P/N 2102	22-18 Single Grip Nylon Butt Connector P/N 2050	22-18 x 1/4 Double Grip Nylon Female Quick Slide P/N 2024	22-18 x 1/4 Double Grip Nylon Fully Insulated Female Quick Slide P/N 2042
22-18 x 8 Double Grip Nylon Ring P/N 2003	22-18 x 6 Double Grip Nylon Hook P/N 2202	22-18 x 8 Double Grip Nylon Spade P/N 2103	22-18 Moisture Resistant Butt Connector P/N 2063	22-18 x 3/16 Double Grip Nylon Male Quick Slide P/N 2053	22-18 x 3/16 Double Grip Nylon Fully Insulated Male Quick Slide P/N 2071
22-18 x 1/4 Double Grip Nylon Ring P/N 2005	22-18 x 8 Double Grip Nylon Hook P/N 2203	22-18 x 10 Double Grip Nylon Spade P/N 2104	22-18 x .110 Double Grip Nylon Female Quick Slide P/N 2055	22-18 x 1/4 Double Grip Nylon Male Quick Slide P/N 2054	22-18 x 1/4 Double Grip Nylon Fully Insulated Male Quick Slide P/N 2072






TRAY FRONT

AUTOMOTIVE/BLADE FUSE ASSORTMENT

P/N 17843

FEATURES:

- Quality flat blade fuses provide safety and reliability by preventing short-circuits and overloads that can cause fires and property damage
- Color-coded for fast, easy identification

 ATM 2 Amp Mini Fuse P/N 6290	 ATM 3 Amp Mini Fuse P/N 6291	 ATM 4 Amp Mini Fuse P/N 6292	 ATM 5 Amp Mini Fuse P/N 6293	 ATM 7-1/2 Amp Mini Fuse P/N 6294	 ATM 10 Amp Mini Fuse P/N 6295
 ATM 15 Amp Mini Fuse P/N 6296	 ATM 20 Amp Mini Fuse P/N 6297	 ATM 25 Amp Mini Fuse P/N 6298	 ATM 30 Amp Mini Fuse P/N 6299	 ATC 3 Amp Fuse P/N 2900	 ATC 4 Amp Fuse P/N 2901
 ATC 5 Amp Fuse P/N 2902	 ATC 7-1/2 Amp Fuse P/N 2903	 ATC 10 Amp Fuse P/N 2904	 ATC 15 Amp Fuse P/N 2905	 ATC 20 Amp Fuse P/N 2906	 ATC 25 Amp Fuse P/N 2907
 ATC 30 Amp Fuse P/N 2908	 Maxi 20 Amp Fuse P/N 29050	 Maxi 30 Amp Fuse P/N 29051	 Maxi 40 Amp Fuse P/N 29052	 Maxi 50 Amp Fuse P/N 29053	 Maxi 60 Amp Fuse P/N 29054

TRAY FRONT




AUTOMOTIVE BULB AND FLASHER ASSORTMENT

P/N 17853


FEATURES:

- All lamps/bulbs are identified by the standard industry number
- Electronic signal flashers meet the demands of heavy trucks and conform to all D.O.T. requirements and SAE specifications


#67
AUTO/TRUCK BULB
P/N 28904




#89
AUTO/TRUCK BULB
P/N 28906




#1156
AUTO/TRUCK BULB
P/N 28928




#1157
AUTO/TRUCK BULB
P/N 28930



#53
AUTO/TRUCK BULB
P/N 28900



#1893
AUTO/TRUCK BULB
P/N 28938




EXTRA HEAVY
5X SERIES / 2 PRONG
P/N 29060



#194
AUTO/TRUCK BULB
P/N 28914



#1895
AUTO/TRUCK BULB
P/N 28940



EXTRA HEAVY
5X SERIES / 3 PRONG
P/N 29061



TRAY FRONT

PIGTAIL STRAIN RELIEF ASSORTMENT

P/N 17851

FEATURES:

- Liquid tight, spiral strain relief that offers additional safety against overstress and conductor breakage.
- Ideally suited for hand-held equipment, moving machinery, robotics and instrumentation.
- PG thread size lock nuts are included. NPT size lock nuts are sold separately.

Diameter Range:
.118 - .255
Mounting Hole:
.492



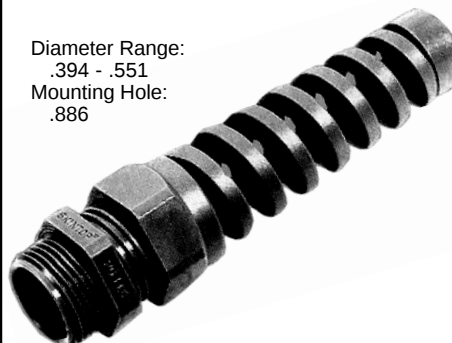
PG-7
PIGTAIL STRAIN RELIEF
P/N 28180

Diameter Range:
.197 - .394
Mounting Hole:
.733



PG-11
PIGTAIL STRAIN RELIEF
P/N 28182

Diameter Range:
.394 - .551
Mounting Hole:
.886



PG-16
PIGTAIL STRAIN RELIEF
P/N 28184

Diameter Range:
.157 - .314
Mounting Hole:
.599



PG-9
PIGTAIL STRAIN RELIEF
P/N 28181

Diameter Range:
.236 - .472
Mounting Hole:
.804



PG-13.5
PIGTAIL STRAIN RELIEF
P/N 28183


Diameter Range:
.236 - .472
Mounting Hole:
.825



1/2 NPT
PIGTAIL STRAIN RELIEF
P/N 28185

NOT ACTUAL
SIZE

1/2 NPT LOCK NUT
P/N 28204



3/4 NPT
LOCK NUT
P/N 28205



Diameter Range:
.545 - .709
Mounting Hole:
1.050

3/4 NPT
PIGTAIL STRAIN RELIEF
P/N 28186


TRAY FRONT

STRAIN RELIEF ASSORTMENT

P/N 17852

FEATURES:

- Liquid tight, unique, easy to assemble strain relief cable connectors.
- Universally suited for all types of machinery and equipment, including automation, motion control and robotics.
- PG thread size lock nuts are included. NPT size lock nuts are sold separately.

Diameter Range: .118 - .255 Mounting Hole: .492  PG-7 STRAIN RELIEF P/N 28190	Diameter Range: .236 - .472 Mounting Hole: .804  PG-13.5 STRAIN RELIEF P/N 28193	Diameter Range: .708 - .984 Mounting Hole: 1.457  PG-29 STRAIN RELIEF P/N 28196	 3/4 NPT LOCK NUT P/N 28205
Diameter Range: .157 - .314 Mounting Hole: .599  PG-9 STRAIN RELIEF P/N 28191	Diameter Range: .394 - .551 Mounting Hole: .886  PG-16 STRAIN RELIEF P/N 28194	3/4 NPT STRAIN RELIEF P/N 28188	Diameter Range: .545 - .709 Mounting Hole: 1.050 
Diameter Range: .197 - .394 Mounting Hole: .733  PG-11 STRAIN RELIEF P/N 28192	Diameter Range: .545 - .709 Mounting Hole: 1.115  PG-21 STRAIN RELIEF P/N 28195	 1/2 NPT LOCK NUT P/N 28204	 1 NPT LOCK NUT P/N 28206
		1/2 NPT STRAIN RELIEF P/N 28187	Diameter Range: .236 - .472 Mounting Hole: .825 
			1 NPT STRAIN RELIEF P/N 28189

TRAY FRONT



CONNECTOR INSTRUCTIONS

1. Strip wire end
08-10 and 12-18 AWG – approximately 1/2"
18-24 AWG – approximately 3/8"
2. Insert wire into male end
EXPOSE BARE WIRE ONLY
3. Hand tighten male end into barrel

CONNECTION COMPLETED!
Repeat steps 1 - 3 for other wire

POSI-LOCK™ CONNECTOR & SUR-SEAL™ TERMINAL ASSORTMENT



FEATURES:

- No tools required
- Up to 4 times stronger than crimp connectors
- Multiple splice connections (over 26 wire combinations)
- High temperature and chemical resistant

- Reusable & reconnectable, weather resistant brass core
- Heat shrink tubing & tin plated high conductivity copper connectors bond together to form a moisture-proof seal

P/N 17863



 18-24 AWG Posi-Lock™ Connector – Red P/N 20600	 20-22 AWG Posi-Tap™ Connector – Red P/N 20637	 22-18 AWG / Stud Size 8-10 Sur-Seal™ Terminal – Red P/N 2828	 16-14 AWG / Stud Size 1/4" Sur-Seal™ Terminal – Blue P/N 2821
 16-14 AWG Posi-Lock™ Connector – Blue P/N 20627	 16-18 AWG Posi-Tap™ Connector – Blue P/N 20638	 22-18 AWG / Stud Size 8-10 Sur-Seal™ Terminal – Red P/N 2817	 16-14 AWG / Stud Size 5/16" Sur-Seal™ Terminal – Blue P/N 2822
 12-10 AWG Posi-Lock™ Connector – Yellow P/N 20628	 12-18 AWG Posi-Tap™ Connector – Black P/N 20639	 16-14 AWG / Stud Size 8-10 Sur-Seal™ Terminal – Blue P/N 2820	 12-10 AWG / Stud Size 8-10 Sur-Seal™ Terminal – Yellow P/N 2824
 6-8 AWG Posi-Lock™ Connector – White P/N 20617	 10-16 AWG Posi-Tap™ Connector – Yellow P/N 20640	 12-18 AWG Posi-Lock™ Blade Fuseholder P/N 20618	 12-18 AWG Posi-Lock™ Glass Tube Fuseholder P/N 20606

TRAY FRONT



INSTRUCTIONS:
 1. Insert conduit/pipe into open hanger.
 2. Apply slight pressure to the conduit/pipe and the jaws close and lock. Do not try to squeeze the hanger closed.

CONDUIT / PIPE HANGER ASSORTMENT


P/N 17882

FEATURES:


- Highly versatile – works with all types of cable and conduit
- Easy to use – requiring only one installer
- Economical – since installation time is routinely reduced by up to 35%
- Highly adaptable – can be attached to cable tray, concrete, brick, cinder block, sheet metal, fiberglass, strut – virtually any surface or structural member
- Corrosion resistant – made of durable Nylon 12 Grilamid®




.374 - .465 (#10)
P/N 22971




.661 - .768 (#17)
P/N 22974




.969 - 1.094 (#25)
P/N 22977




1.398 - 1.555 (#36)
P/N 22980




.465 - .563 (#12)
P/N 22972




.768 - .866 (#20)
P/N 22975




1.094 - 1.228 (#28)
P/N 22978




1.555 - 1.713 (#40)
P/N 22981



.563 - .661 (#15)
P/N 22973



.866 - .898 (#22)
P/N 22976



1.228 - 1.398 (#32)
P/N 22979

TRAY FRONT

BRAZED SEAM RING TERMINALS









P/N 17886

FEATURES:

- Terminals have nylon insulation and brazed seam for superior performance
- Funnel design for post, positive wire insertion
- Operating temperature -40°F to 221°F (-40°C to 105°C)

165

A20-36

 8 GA x 10 P/N 21000	 8 GA x 1/2 P/N 21005	 6 GA x 3/8 P/N 21010	 4 GA x 5/16 P/N 21016
 8 GA x 1/4 P/N 21001	 6 GA x 10 P/N 21007	 6 GA x 1/2 P/N 21012	 4 GA x 3/8 P/N 21017
 8 GA x 5/16 P/N 21002	 6 GA x 1/4 P/N 21008	 4 GA x 10 P/N 21014	 4 GA x 1/2 P/N 21019
 8 GA x 3/8 P/N 21003	 6 GA x 5/16 P/N 21009	 4 GA x 1/4 P/N 21015	EXPANSION

TRAY FRONT



NON-INSULATED BRAZED SEAM TERMINALS (22-18 GA)

P/N 17887

FEATURES:

- Non-insulated terminals have a brazed seam for superior performance
- Beveled smooth for easy wire insertion
- Operating temperature to 347°F (175°C)

 22-18 x 2-6 Multi-Ring P/N 24110	 22-18 x 1/4 Ring P/N 24117	 22-18 x 3/16 Female Disconnect P/N 24136	 22-18 x 3/16 Female Flag Terminal P/N 24147
 22-18 x 6-10 Multi-Ring P/N 24111	 22-18 x 6 Spade P/N 24126	 22-18 x 1/4 Female Disconnect P/N 24137	EXPANSION
 22-18 x 6 Ring P/N 24115	 22-18 x 10 Spade P/N 24127	 22-18 x 3/16 Male Disconnect P/N 24140	EXPANSION
 22-18 x 10 Ring P/N 24116	 22-18 Seamless Butt Connector P/N 24132	 22-18 x 1/4 Male Disconnect P/N 24141	EXPANSION

TRAY FRONT



NON-INSULATED BRAZED SEAM TERMINALS (16-14 GA)

P/N 17888

FEATURES:

- Non-insulated terminals have a brazed seam for superior performance
- Beveled smooth for easy wire insertion
- Operating temperature to 347°F (175°C)

 16-14 x 2-6 Multi-Ring P/N 24112	 16-14 x 1/4 Ring P/N 24120	 16-14 Seamless Butt Connector P/N 24133	 16-14 x 1/4 Male Disconnect P/N 24143
 16-14 x 6-10 Multi-Ring P/N 24113	 16-14 x 3/8 Ring P/N 24121	 16-14 x 3/16 Female Disconnect P/N 24138	 16-14 x 3/16 Female Flag Terminal P/N 24148
 16-14 x 6 Ring P/N 24118	 16-14 x 6 Spade P/N 24128	 16-14 x 1/4 Female Disconnect P/N 24139	EXPANSION
 16-14 x 10 Ring P/N 24119	 16-14 x 10 Spade P/N 24129	 16-14 x 3/16 Male Disconnect P/N 24142	EXPANSION

TRAY FRONT

NON-INSULATED BRAZED SEAM TERMINALS (12-10 GA)

P/N 17889

FEATURES:

- Non-insulated terminals have a brazed seam for superior performance
- Beveled smooth for easy wire insertion
- Operating temperature to 347°F (175°C)

450




12-10 x 6-10 Multi-Ring
P/N 24114



12-10 x 1/4 Ring
P/N 24124



12-10 x 6 Spade
P/N 24130



12-10 Seamless
Butt Connector
P/N 24134



12-10 x 6 Ring
P/N 24122



12-10 x 3/8 Ring
P/N 24125



12-10 x 10 Spade
P/N 24131



12-10 x 1/4
Male Disconnect
P/N 24144









12-10 x 10 Ring
P/N 24123

A20-39

TRAY FRONT

FEATURES:

- Crimp, solder and screw type alligator clips
- Red and black insulators for easy color-coding

 2-3/8 x 5/16 Alligator Clip - Steel Red P/N 8274	 2-3/8 x 5/16 Alligator Clip - Steel Black P/N 8272	 2-1/8 x 5/16 Crocodile Clip - Copper P/N 28272	 Insulator for 28272 Black P/N 28286	 Insulator for 28272 Red P/N 28287	 2-7/16 x 5/8 General Purpose - Steel P/N 28273
 2 x 5/16 Alligator Clip - Steel P/N 8270	 Insulator for 8270/8276 Red P/N 8298	 Insulator for 8270/8276 Black P/N 8296	 2 x 1/2 General Purpose - Steel P/N 8292	 1-1/2 x 5/16 General Purpose - Steel P/N 8290	 Insulator for 28273 Red P/N 28303
 1-3/32 x 3/16 Mini-Alligator Clip - Steel P/N 28270	 Insulator for 28270 Red P/N 28281	 Insulator for 28270 Black P/N 28280	 Insulator for 8292 Red P/N 28297	 Insulator for 8290 Red P/N 28291	 Insulator for 28273 Black P/N 28300
 1-3/32 x 3/16 Mini-Alligator Clip - Steel P/N 8284	 Insulator for 8284/8286 Red P/N 28277	 Insulator for 8284/8286 Black P/N 28274	 Insulator for 8292 Black P/N 28294	 Insulator for 8290 Black P/N 28288	EXPANSION

TRAY FRONT














COMPRESSION LUGS & BUTT CONNECTORS

P/N 17890

FEATURES:

- High Conductivity
- Wrought Copper
- Electro Tin Plated to Minimize Corrosion
- Long Barrel Permits Two Crimps for Heavy Loads
- Color Code Designates Cable Size and Tool Setting Die
- Chamfered Ends Provide Easy Cable Insertion

 8 GA x 10 Compression Lug P/N 22314	 2 GA x 5/16 Compression Lug P/N 22318	 1/0 x 3/8 Compression Lug P/N 22322	 3/0 x 1/2 Compression Lug P/N 22326	 6 GA Compression Butt Connector P/N 22301	 1/0 Compression Butt Connector P/N 22305
 6 GA x 1/4 Compression Lug P/N 22315	 1 GA x 1/4 Compression Lug P/N 22319	 2/0 x 3/8 Compression Lug P/N 22323	 4/0 x 3/8 Compression Lug P/N 22327	 4 GA Compression Butt Connector P/N 22302	 2/0 Compression Butt Connector P/N 22306
 4 GA x 1/4 Compression Lug P/N 22316	 1 GA x 5/16 Compression Lug P/N 22320	 2/0 x 1/2 Compression Lug P/N 22324	 4/0 x 1/2 Compression Lug P/N 22328	 2 GA Compression Butt Connector P/N 22303	 3/0 Compression Butt Connector P/N 22307
 2 GA x 1/4 Compression Lug P/N 22317	 1/0 x 5/16 Compression Lug P/N 22321	 3/0 x 3/8 Compression Lug P/N 22325	 8 GA Compression Butt Connector P/N 22300	 1 GA Compression Butt Connector P/N 22304	 4/0 Compression Butt Connector P/N 22308

TRAY FRONT












DOUBLE GRIP NYLON INSULATED TERMINAL ASSORTMENT

P/N 17903

FEATURES:

- Double crimp holds both wire and insulation for added strength
- Funnel design for fast, positive wire insertion
- High temperature nylon insulation

485

 22-18 x 6 RING CONNECTOR P/N 2002	 16-14 x 10 RING CONNECTOR P/N 2011	 12-10 x 10 RING CONNECTOR P/N 2017	 22-18 x 10 SPADE P/N 2104	 16-14 x 1/4 MALE QUICK SLIDE P/N 2025	 12-10 x 1/4 FEMALE QUICK SLIDE P/N 2036
 22-18 x 10 RING CONNECTOR P/N 2004	 16-14 x 1/4 RING CONNECTOR P/N 2012	 12-10 x 1/4 RING CONNECTOR P/N 2018	 16-14 x 10 SPADE P/N 2111	 12-10 x 1/4 MALE QUICK SLIDE P/N 2748	 22-18 BUTT CONNECTOR P/N 2750
 22-18 x 1/4 RING CONNECTOR P/N 2005	 16-14 x 3/8 RING CONNECTOR P/N 2014	 12-10 x 3/8 RING CONNECTOR P/N 2020	 12-10 x 10 SPADE P/N 2117	 22-18 x 1/4 FEMALE QUICK SLIDE P/N 2024	 16-14 BUTT CONNECTOR P/N 2760
 16-14 x 6 RING CONNECTOR P/N 2009	 12-10 x 6 RING CONNECTOR P/N 2015	 12-10 x 1/2 RING CONNECTOR P/N 2021	 22-18 x 1/4 MALE QUICK SLIDE P/N 2054	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2035	 12-10 BUTT CONNECTOR P/N 2770

A20-43

TRAY FRONT

- Long lasting and dependable – even after 5 years of storage
- Lasts up to five times longer than super heavy duty batteries
- Long service life at high drain discharges
- Less likely to leak, protecting important equipment

- Mercury free
- Operates reliably in temperature extremes of -39°F to 106°F (-20°C to 54°C)
- Date coded to ensure freshness

 D PROCELL ALKALINE BATTERY P/N 29201	 C PROCELL ALKALINE BATTERY P/N 29202	 AA PROCELL ALKALINE BATTERY P/N 29203	 9V PROCELL ALKALINE BATTERY P/N 29200
 D PROCELL ALKALINE BATTERY P/N 29201	 C PROCELL ALKALINE BATTERY P/N 29202	 AA PROCELL ALKALINE BATTERY P/N 29203	 9V PROCELL ALKALINE BATTERY P/N 29200
 D PROCELL ALKALINE BATTERY P/N 29201	 C PROCELL ALKALINE BATTERY P/N 29202	 AA PROCELL ALKALINE BATTERY P/N 29203	 AAA PROCELL ALKALINE BATTERY P/N 29204
 D PROCELL ALKALINE BATTERY P/N 29201	 C PROCELL ALKALINE BATTERY P/N 29202	 AA PROCELL ALKALINE BATTERY P/N 29203	 AAA PROCELL ALKALINE BATTERY P/N 29204

TRAY FRONT

PUSH-CON/SNAP-CON/SPRING-CON WIRE CONNECTOR ASSORTMENT

P/N 17908

- Connects both stranded and solid copper wire
- Push-Con have clear housing which allows visual identification
- No more twisting and taping required – simply strip the wire and insert the conductor
- Integrated test port allows for continuity testing without re-insertion
- Touch-proof and rated to 206°F (105°C)
- UL listed / CSA certified for 600 volts (1000 volts for fixtures and signs)



2-CONDUCTOR
PUSH-CON WIRE CONNECTOR – YELLOW
12-16 AWG Stranded or 12-18 AWG Solid Copper
P/N 2521



6-CONDUCTOR
PUSH-CON WIRE CONNECTOR – BLACK
12-16 AWG Stranded or 12-18 AWG Solid Copper
P/N 2523



3-CONDUCTOR
SNAP-CON WIRE CONNECTOR
P/N 2518



4-CONDUCTOR HI-TEMP
PUSH-CON WIRE CONNECTOR – BLACK
P/N 2532



8-CONDUCTOR
PUSH-CON WIRE CONNECTOR – GREY
12-16 AWG Stranded or 12-18 AWG Solid Copper
P/N 2524



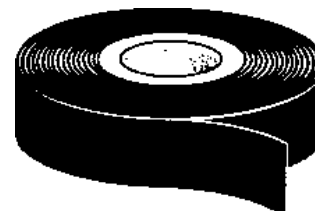
SPRING-CON BUTT CONNECTOR – GRAY
12-28 AWG Stranded or Solid Wire
P/N 2516



4-CONDUCTOR
PUSH-CON WIRE CONNECTOR – ORANGE
12-16 AWG Stranded or 12-18 AWG Solid Copper
P/N 2522



3-CONDUCTOR
SNAP-CON WIRE CONNECTOR – RED
10-14 AWG Stranded or 10-14 AWG Solid Copper
P/N 2517



3/4" x 60' COBRA INSULATED TAPE
P/N 2199



MULTI-PURPOSE STRIP & CRIMP TOOL
P/N 8256

TRAY FRONT



CSS TERMINALS (CRIMP-SOLDER-SEAL) ASSORTMENT




P/N 17909

FEATURES:

- Crimped for maximum reliability and easy installation
- Soldered for additional strength and better conductivity
- Sealed for durable insulation and watertight connection



1. Strip the wire 1/2".
2. Select a connector that matches the wire gauge and insert the wire thru the solder sleeve and terminal barrel.
3. Make sure the wire is properly seated and crimp the terminal barrel (the 1/4" of the barrel closest to the terminal end) using an insulated connector crimping tool nest that matches the color or gauge of the terminal.
4. Apply heat evenly around the length of the tubing (including the crimp area) until the tubing fully recovers and the adhesive flows.
5. Continue distributing the heat over the solder sleeve until the solder flows into the terminal barrel.
6. Remove from the heat and let cool for the ULTIMATE connection.

 18-20 x 6 CSS Ring P/N 21700	 14-16 x 10 CSS Ring P/N 21708	 10-12 x 10 CSS Ring P/N 21714	 18-20 x 10 CSS Spade P/N 21721	 18-20 CSS Butt Connector P/N 21738	 18-20 CSS Male Quick Slide 1/4 P/N 21743
 18-20 x 10 CSS Ring P/N 21702	 14-16 x 1/4 CSS Ring P/N 21709	 10-12 x 1/4 CSS Ring P/N 21715	 14-16 x 6 CSS Spade P/N 21722	 14-16 CSS Butt Connector P/N 21739	 14-16 CSS Female Quick Slide 1/4 Fully Insulated P/N 21745
 18-20 x 1/4 CSS Ring P/N 21703	 14/16 x 5/16 CSS Ring P/N 21710	 10-12 x 3/8 CSS Ring P/N 21717	 14-16 x 10 CSS Spade P/N 21724	 10-12 CSS Butt Connector P/N 21740	 14-16 CSS Male Quick Slide 1/4 P/N 21746
 14-16 x 6 CSS Ring P/N 21706	 14-16 x 3/8 CSS Ring P/N 21711	 10-12 x 1/2 CSS Ring P/N 21718	 10-12 x 10 CSS Spade P/N 21727	 18-20 CSS Female Quick Slide 1/4 Fully Insulated P/N 21742	 10-12 CSS Female Quick Slide 1/4 Fully Insulated P/N 21748  10-12 CSS Male Quick Slide 1/4 P/N 21749

TRAY FRONT



CIC 200™ CLEAR SHRINK TUBING

FEATURES:

- Dual wall flexible clear polyolefin tubing with thick wall adhesive
- Clear for easy viewing of finished product
- Operating temperature range is -67°F (-55°C) to 230°F (110°C)
- Recommended in applications requiring moisture protection or waterproofing
- Shrink temperature is 239°F (115°C)

P/N 17925



43

1/8" x 12"
P/N 26090



3/16" x 12"
P/N 26091



1/4" x 12"
P/N 26092



3/8" x 12"
P/N 26093



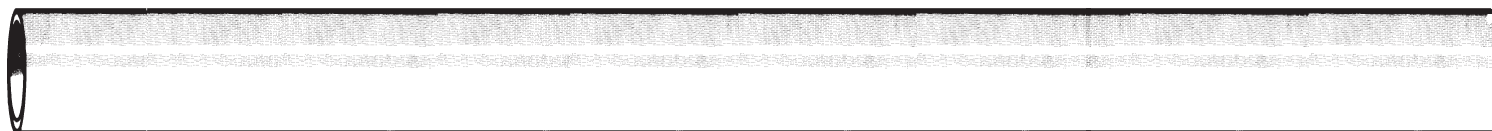
1/2" x 12"
P/N 26094



3/4" x 12"
P/N 26095



1" x 12"
P/N 26096



A20-47

TRAY FRONT

CHROMATE INDUSTRIAL CORP. • 5250-A NAIMAN PARKWAY, SOLON, OH 44139 • 1-800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

071012



BATTERY TERMINAL REPAIR ASSORTMENT

HEAT SHRINK TUBING:

- Thick wall for abrasion protection and puncture resistance
- Sealant locks out corrosion causing elements
- Made of a tough crosslinked polyolefin

SUR-SEAL BUTT CONNECTOR:

- Protection for splices exposed to the elements
- Heat shrink tubing provides a high strength, water-tight seal

LECTROSEAL:

- Heavy polyvinyl chloride backing
- Self-fuseing, rubber based insulating compound

FUSION SEAL:

- Weather and saltwater resistant
- Form fitting
- Electrical insulator

MAGNA-LUG:

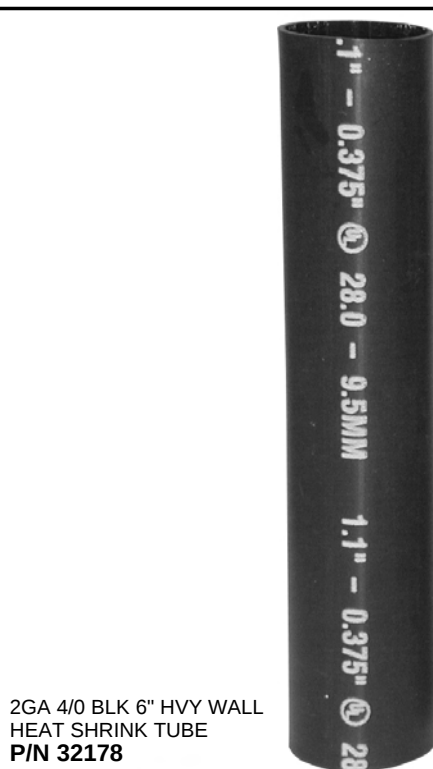
- Wider pads for better electrical contact
- Thicker pads for greater strength
- 80% thicker walls for greater conductivity and strength

MILITARY BATTERY CONNECTORS:


- Mil specs A52425-1 / A52425 - 2

P/N 17936
P/N 17936SAND

40



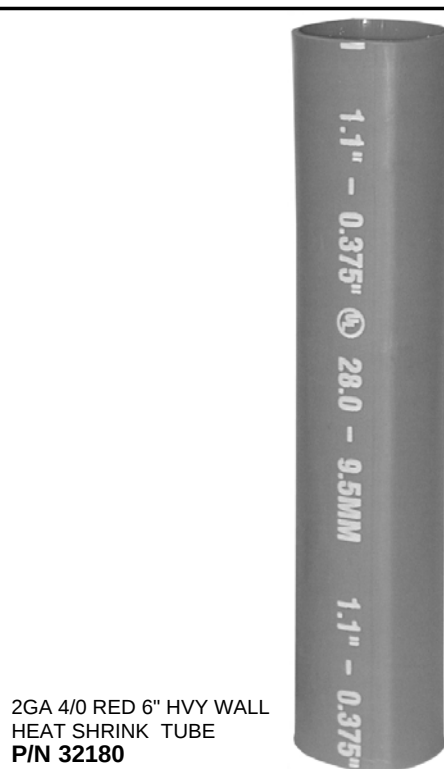2GA 4/0 BLK 6" HVY WALL
HEAT SHRINK TUBE
P/N 32178




2GA 4/0 RED 6" HVY WALL
HEAT SHRINK TUBE
P/N 32180



2/0 GA MAGNA-LUG
1/2 STUD
P/N 32206



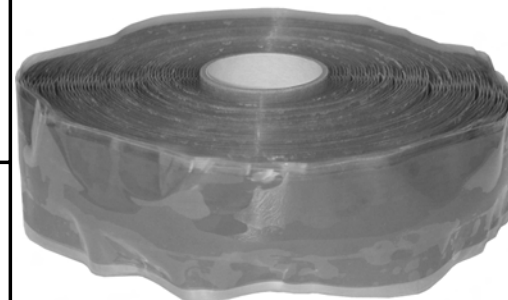16-14 SUR-SEAL
BUTT CONNECTOR
P/N 2842



1 X 36 FUSION SEAL
ELEC WRAP-RED
P/N 2899



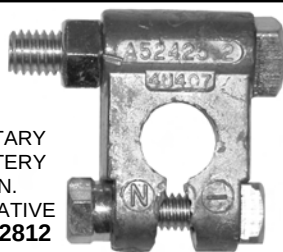
STUD NUT
P/N 32165



2-1/2 X 10'
LECTRO SEAL "600"
P/N 2898



MILITARY
BATTERY
CONN.
POSITIVE
P/N 2810



MILITARY
BATTERY
CONN.
NEGATIVE
P/N 2812



SIDE MOUNT BOLT-OEM
P/N 32166

TRAY FRONT

A20-48

FEATURES:

- Contains Chromate's high strength terminals for lasting repairs

16-14 x .157 SNAP PLUG P/N 2030		16-14 x .176 SNAP PLUG P/N 2029		16-14 x .157 SNAP PLUG RECEPTACLE P/N 2784		16-14 x .176 SNAP PLUG RECEPTACLE P/N 2765		.156 2-WAY SNAP PLUG CONNECTOR P/N 2040		
16-14 x 4-6 SUR SEAL RING CONNECTOR P/N 2819		16-14 x 8-10 SUR SEAL RING CONNECTOR P/N 2820		16-14 x 1/4 SUR-SEAL RING CONNECTOR P/N 2821		16-14 x 5/16 SUR-SEAL RING CONNECTOR P/N 2822		16-14 x 3/8 SUR-SEAL RING CONNECTOR P/N 2823		
16-14 x 6 SUR SEAL SNAP SPADE P/N 21606		16-14 x 8 SUR SEAL SNAP SPADE P/N 21607		16-14 x 10 SUR-SEAL SNAP SPADE P/N 21608		16-14 x 1/4 SUR-SEAL SNAP SPADE P/N 21609				
16-14 x 1/4 SUR SEAL FULLY INSULATED FEMALE QUICK SLIDE P/N 2845		16-14 x 1/4 SUR SEAL FULLY INSULATED MALE QUICK SLIDE P/N 2844		16-14 SUR-SEAL BUTT CONNECTOR P/N 2842		4 GA MAGNA-LUG 3/8 STUD P/N 32214				

TRAY FRONT

BLOW ALERT FUSE ASSORTMENT

P/N 17963

FEATURES:

- It glows when it blows – when a circuit short or surge occurs, a light atop the fuse immediately indicates which fuse needs replacing
- Color-coded for fast amperage identification
- Built to exacting oem specifications
- Saves time and effort and eliminates guesswork and testing

66

					
ATM 3 Amp Mini Fuse – Violet P/N 6280	ATM 5 Amp Mini Fuse – Tan P/N 6281	ATM 7.5 Amp Mini Fuse – Brown P/N 6282	ATM 10 Amp Mini Fuse – Red P/N 6283	ATM 15 Amp Mini Fuse – Blue P/N 6284	ATM 20 Amp Mini Fuse – Yellow P/N 6285
					
ATM 25 Amp Mini Fuse – Natural P/N 6286	ATM 30 Amp Mini Fuse – Green P/N 6287	ATC 3 Amp Fuse – Violet P/N 29070	ATC 5 Amp Fuse – Tan P/N 29071	ATC 7.5 Amp Fuse – Brown P/N 29072	ATC 10 Amp Fuse – Red P/N 29073
					
ATC 15 Amp Fuse – Blue P/N 29074	ATC 20 Amp Fuse – Yellow P/N 29075	ATC 25 Amp Fuse – Natural P/N 29076	ATC 30 Amp Fuse – Green P/N 29077	ATC 40 Amp Fuse – Orange P/N 29078	Maxi 20 Amp Fuse – Yellow P/N 29080
					
Maxi 30 Amp Fuse – Green P/N 29081	Maxi 40 Amp Fuse – Orange P/N 29082	Maxi 50 Amp Fuse – Red P/N 29083	Maxi 60 Amp Fuse – Blue P/N 29084	Maxi 70 Amp Fuse – Tan P/N 29085	Maxi 80 Amp Fuse – Natural P/N 29086

TRAY FRONT

A20-51

RELEASABLE WIRE TIE ASSORTMENT

RELEASABLE WIRE TIE FEATURES:

- Temporary or permanent bundling allows for quick addition or removal of wires or items
- Strap finger release latch allows easy access but reduces snags compared to top latch style

SNAP-TIE FEATURES:

- Just one snap to tie and untie
- Made of durable nylon 6/6 and fully reusable
- Once applied, the tail can be tucked away for added safety
- Highly visible yellow color
- Versatile design allows use for multiple applications

P/N 17968

155

- **BLACK – RECOMMENDED FOR OUTDOOR USE**
- **SUPERIOR ULTRAVIOLET RESISTANCE AND LONG LIFE**

5/16" W x 6" L
1-3/8" Max. Dia. 50 psi
P/N 8452



3/16" W x 14-1/2" L
4" Max. Dia. 50 psi
P/N 8595



- **WHITE – RECOMMENDED FOR INDOOR USE**

5/16" W x 6" L
1-3/8" Max. Dia. 50 psi
P/N 8451



3/16" W x 14-1/2" L
4" Max. Dia. 50 psi
P/N 8598



1/2" W x 29-1/2" L
.75 - 8.25" Max. Dia.
200 lbs. tensile strength
P/N 8079



A20-55

TRAY FRONT



NYLON CABLE CLAMPS ASSORTMENT P/N 17974

FEATURES:

- Rustproof, rotproof, weatherproof and chemical proof
- Temperature range is -40°F to 185°F continuously, 250°F intermittently.

925

5/32 x 1/8 Black P/N 2602		3/8 x 1/2 Black P/N 2618			1/2 x 3/4 White P/N 2994
5/32 x 3/16 Black P/N 2604		1/2 x 5/8 Black P/N 2642			
1/4 x 1/4 Black P/N 2608		1/2 x 1/8 White P/N 2976			
3/8 x 5/16 Black P/N 2612		1/2 x 3/16 White P/N 2977			
3/8 x 3/8 Black P/N 2614		1/2 x 1/4 White P/N 2978			
3/8 x 7/16 Black P/N 2616		1/2 x 5/16 White P/N 2979			

TRAY FRONT

A20-56



PRODUCT DIAMETER RANGE:
Minimum = Seal Diameter
Maximum = Connector Clearance Dimension

COLD SHRINK TUBING ASSORTMENT

P/N 17989

FEATURES:

- Pre-stretched on a removable core for efficiency and ease of installation
- Shrink to fit to ensure a permanent, durable environmental seal and protection
- No torches or heat required
- Water-resistant – meets the water seal requirements of ANSI C119.1
- Resists acids and alkalis; resists ozone

PRODUCT DIAMETER RANGE
0.31" - 0.56"
P/N 66080



RELAXED TUBE LENGTH
6"

PRODUCT DIAMETER RANGE
0.10" - 0.82"
P/N 66081



RELAXED TUBE LENGTH
8"

PRODUCT DIAMETER RANGE
0.40" - 0.82"
P/N 66082



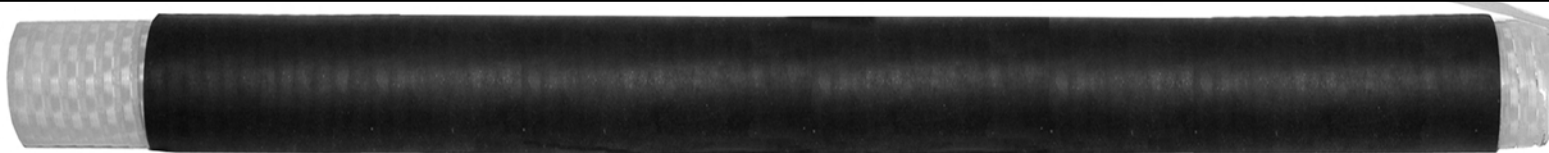
RELAXED TUBE LENGTH
8"

PRODUCT DIAMETER RANGE
0.55" - 1.18"
P/N 66083




RELAXED TUBE LENGTH
9"

PRODUCT DIAMETER RANGE
0.55" - 1.18"
P/N 66084



RELAXED TUBE LENGTH
11"

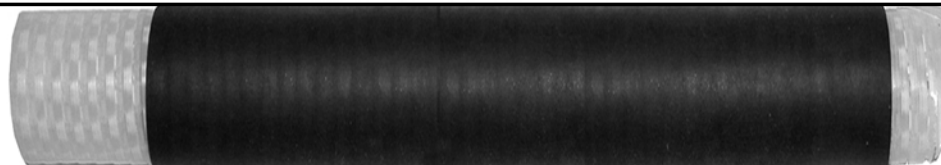PRODUCT DIAMETER RANGE
0.67" - 1.38"
P/N 66085**



RELAXED TUBE LENGTH
6"

**Primary uses: Sealing of terminal lug barrels,
conduit couplings and conduit-to-cable breakouts.

TRAY FRONT

HEAT SHRINK CONNECTORS AND TUBING ASSORTMENT

FEATURES:

- Window on connector allows visual inspection
- High adhesive-flow polyolefin tubing seals multiple wires
- Uniform copper wall
- Crimp indicator
- Color-coded dashes on tubing indicate sizes
- Clear tubing allows visual inspection

P/N 17997

 24-22 AWG Heat Shrink Multi Wire In-line Connector P/N 21616	 20-18 AWG Heat Shrink Multi Wire In-line Connector P/N 21617	 0.22" ID - 0.045 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32181	 0.30" ID - 0.06 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32182
 16-14 AWG Heat Shrink Multi Wire In-line Connector P/N 21618	 12-10 AWG Heat Shrink Multi Wire In-line Connector P/N 21619	 0.35" ID - 0.08 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32183	 0.45" ID - 0.105 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32184
 22-14 AWG Heat Shrink Multi Wire Closed End Connector P/N 21620	 18-10 AWG Heat Shrink Multi Wire Closed End Connector P/N 21621		

TRAY FRONT



HMMWV WEATHER RESISTANT THERMO TIE ASSORTMENT

P/N 17013

FEATURES:

- Fast, easy and efficient way to tie wires and cables
- Resistant to solvents, fungus, oil, grease, alkalies, mild acids, ultra violet rays, etc.
- Meets MIL specifications (3367-1 to 7-0)
- Temperature range 65°F to 185°F

425

5/16" W x 15-1/8" L
4-1/16" Max. Dia.
120 psi
P/N 8443



3/16" W x 14-1/2" L
4-1/8" Max. Dia.
50 psi
P/N 8437



3/16" W x 11-1/8" L
3-1/16" Max. Dia.
50 psi
P/N 8439



3/16" W x 7-1/2" L
1-7/8" Max. Dia.
50 psi
P/N 8438



3/32" W x 6" L
1-1/2" Max. Dia.
18 psi
P/N 8432



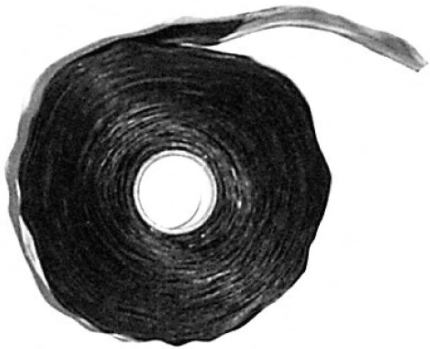



3/32" W x 4" L
7/8" Max. Dia.
18 psi
P/N 8431



A20-59

TRAY FRONT

234

 THICK WALL HEAT SHRINK TUBING - RED - 6" 3 TO 1 SHRINK RATIO 14-4 WIRE RANGE ID: 1/2" POST SHRINK ID: 5/32" P/N 32168	 THICK WALL HEAT SHRINK TUBING - BLACK - 6" 3 TO 1 SHRINK RATIO 14-4 WIRE RANGE ID: 1/2" POST SHRINK ID: 5/32" P/N 32170	 BRAZED SEAM RING TERMINAL NYLON INSULATED 8 GA x 1/4" P/N 21001	 BRAZED SEAM RING TERMINAL NYLON INSULATED 6 GA x 1/4" P/N 21008
 FUSION SEAL ELECTRICAL WRAP - BLACK P/N 28991	 IN-LINE TAP - BLUE WIRE SIZE: 18-14 20 AMP MAX. P/N 2032	 BRAZED SEAM RING TERMINAL NYLON INSULATED 8 GA x 3/8" P/N 21003	 BRAZED SEAM RING TERMINAL NYLON INSULATED 6 GA x 3/8" P/N 21010
		 BRAZED SEAM RING TERMINAL NYLON INSULATED 8 GA x 1/2" P/N 21005	 BRAZED SEAM RING TERMINAL NYLON INSULATED 6 GA x 1/2" P/N 21012
		 ATC 20 AMP FUSE - YELLOW P/N 29075	 ATC 30 AMP FUSE - GREEN P/N 29077

A20-60

TRAY FRONT




HMMVV ALUMINUM PULL RIVET ASSORTMENT

P/N 17015

FEATURES:

- A convenient assortment of aluminum rivets that includes both dome and large flange styles.

1101

 LARGE FLANGE 1/8" DIAMETER 1/16" to 1/8" GRIP #30 DRILL P/N 9838	 DOMO HEAD 3/16" DIAMETER To 1/8" GRIP #11 DRILL P/N 9827	 DOMO HEAD 3/16" DIAMETER 3/8" to 1/2" GRIP #11 DRILL P/N 9830	 P/N 6885
 LARGE FLANGE 1/8" DIAMETER 1/8" to 1/4" GRIP #30 DRILL P/N 9839	 DOMO HEAD 3/16" DIAMETER 1/8" to 1/4" GRIP #11 DRILL P/N 9828	 DOMO HEAD 3/16" DIAMETER 1/2" to 5/8" GRIP #11 DRILL P/N 9831	
 DOMO HEAD 1/8" DIAMETER 3/16" to 1/4" GRIP #30 DRILL P/N 9809	 DOMO HEAD 3/16" DIAMETER 1/4" to 3/8" GRIP #11 DRILL P/N 9829	 LARGE FLANGE 3/16" DIAMETER 1/2" to 5/8" GRIP #11 DRILL P/N 9846	
 DOMO HEAD 5/32" DIAMETER 1/8" to 1/4" GRIP #20 DRILL P/N 9820	 LARGE FLANGE 3/16" DIAMETER 1/16" to 3/8" GRIP #11 DRILL P/N 9844	EXPANSION	

A20-61






TRAY FRONT

HMMVV WEATHERPAK/ELECTRICAL KIT

FEATURES:

- Weatherpak (Delphi Packard) locking connectors
- Terminals and seals are secured in the connector body with a hinge lock assembly
- Sealed against dust, dirt and moisture
- Silicone seals must be used with the terminals

P/N 17010

					
Weatherpak Terminal Extractor Tool P/N 12014		Weatherpak Female Terminal 20-18 GA P/N 532308	Weatherpak Male Terminal 20-18 GA P/N 532309	Weatherpak Female Terminal 16-14 GA P/N 532306	Weatherpak Male Terminal 16-14 GA P/N 532307
					
Weatherpak Cable Seal – Green 20-18 GA P/N 532312	Weatherpak Cable Seal – Gray 16-14 GA P/N 532311	Weatherpak 1 Terminal Tower P/N 532314	Weatherpak 1 Terminal Shroud P/N 532315	Weatherpak 2 Terminal Tower P/N 532316	Weatherpak 2 Terminal Shroud P/N 532317
					
Male Plug Connector Kit P/N 534441	Female Plug Connector Kit P/N 534442	Weatherpak 3 Terminal Tower P/N 532318	Weatherpak 3 Terminal Shroud P/N 532319	Weatherpak 4 Terminal Tower P/N 532320	Weatherpak 4 Terminal Shroud P/N 532321

TRAY FRONT



WEATHERPAK ASSORTMENT

FEATURES:

- Weatherpak (Delphi Packard) locking connectors
- Terminals and seals are secured in the connector body with a hinge lock assembly
- Sealed against dust, dirt and moisture
- Silicone seals must be used with the terminals

P/N 17016

231

 Weatherpak Terminal Extractor Tool P/N 12014	 Weatherpak Female Terminal 20-18 GA P/N 532308	 Weatherpak Male Terminal 20-18 GA P/N 532309	 Weatherpak Female Terminal 16-14 GA P/N 532306
 Weatherpak Male Terminal 16-14 GA P/N 532307	 Weatherpak Cable Seal – Green 20-18 GA P/N 532312	 Weatherpak Cable Seal – Gray 16-14 GA P/N 532311	 Weatherpak 1 Terminal Tower P/N 532314
 Weatherpak 1 Terminal Shroud P/N 532315	 Weatherpak 2 Terminal Tower P/N 532316	 Weatherpak 2 Terminal Shroud P/N 532317	 Weatherpak 3 Terminal Tower P/N 532318
 Weatherpak 3 Terminal Shroud P/N 532319	 Weatherpak 4 Terminal Tower P/N 532320	 Weatherpak 4 Terminal Shroud P/N 532321	EXPANSION

A20-63

TRAY FRONT



EPDM COVERED CABLE CLAMPS ASSORTMENT

P/N 17017

110

 Cable Clamp .250" / 1/4" Industry No. 4 P/N 30182	 Cable Clamp .375" / 3/8" Industry No. 6 P/N 30183	 Cable Clamp .500" / 1/2" Industry No. 8 P/N 30184	 Cable Clamp .625" / 5/8" Industry No. 10 P/N 30185
 Cable Clamp .750" / 3/4" Industry No. 12 P/N 30186	 Cable Clamp .875" / 7/8" Industry No. 14 P/N 30187	 Cable Clamp 1.000" / 1" Industry No. 16 P/N 30188	 Cable Clamp 1.250" / 1-1/4" Industry No. 20 P/N 30189
 Cable Clamp 1.500" / 1 1/2" Industry No. 24 P/N 30190	 Cable Clamp 1.750" / 1-3/4" Industry No. 28 P/N 30191	 Cable Clamp 2.000" / 2" Industry No. 32 P/N 30192	 Cable Clamp 2.250" / 2-1/4" Industry No. 36 P/N 30193
 Cable Clamp 2.500" / 2-1/2" Industry No. 40 P/N 30194	 Cable Clamp 2.750" / 2-3/4" Industry No. 44 P/N 30195	 Cable Clamp 3.000" / 3" Industry No. 48 P/N 30196	EXPANSION

A20-64

TRAY FRONT













NYLON INSULATED DOUBLE GRIP SOLDERLESS TERMINAL ASSORTMENT

FEATURES:

- Double crimp holds both wire and insulation for added strength
- Funnel design for fast, positive wire insertion
- Deep "V" groove and long barrel for extra strong grip and maximum current flow
- High temperature nylon insulation

P/N 17019

 22-18 BUTT CONNECTOR P/N 2750	 16-14 BUTT CONNECTOR P/N 2760	 12-10 BUTT CONNECTOR P/N 2770	 16-14 x 1/4 MALE QUICK SLIDE P/N 2025	 16-14 x 1/4 FEMALE QUICK SLIDE P/N 2035	 MULTI-PURPOSE STRIP AND CRIMP TOOL P/N 8256
 22-18 x 6 RING CONNECTOR P/N 2002	 22-18 x 8 RING CONNECTOR P/N 2003	 22-18 x 10 RING CONNECTOR P/N 2004	 22-18 x 10 DOUBLE GRIP NYLON HOOK P/N 2204	 22-18 x 10 DOUBLE GRIP NYLON SPADE P/N 2104	
 16-14 x 8 RING CONNECTOR P/N 2010	 16-14 x 10 RING CONNECTOR P/N 2011	 16-14 x 1/4 RING CONNECTOR P/N 2012	 16-14 x 10 DOUBLE GRIP NYLON HOOK P/N 2211	 16-14 x 10 DOUBLE GRIP NYLON SPADE P/N 2111	
 12-10 x 10 RING CONNECTOR P/N 2017	 12-10 x 1/4 RING CONNECTOR P/N 2018	 12-10 x 5/16 DOUBLE GRIP NYLON RING P/N 2019	 12-10 x 10 DOUBLE GRIP NYLON HOOK P/N 2217	 12-10 x 10 DOUBLE GRIP NYLON SPADE P/N 2117	

TRAY FRONT



HEAVY DUTY/DIRECT BURY
HEAT SHRINK TUBING ASSORTMENT

- FEATURES:**
- Shrink Ratio: 3 to 1
 - Flame Retardant
 - For Battery Splices and Terminals
 - DIRECT BURIAL Capability
 - Use in UNDERWATER ENVIRONMENTS
 - For Connections in the Harshesht Conditions
 - Mil Specs: MIL-DTL-23053/15, Class 2
 - UL 486D
 - Material: Polyolefin
 - Length: 12"

P/N 17032

22

0.40"
Black
P/N 66097



0.40"
Red
P/N 66098



0.80"
Black
P/N 66099



0.80"
Red
P/N 66100



1.10"
Black
P/N 66101



1.10"
Red
P/N 66102



1.50"
Black
P/N 66103



A20-66

TRAY FRONT



MAGNA LUG STARTER/GROUND UG BATTERY TERMINAL ASSORTMENT

FEATURES:

- COLOR CODED FOR EASY IDENTIFICATION
- WIDER PADS FOR BETTER ELECTRICAL CONTACT
- THICKER PADS FOR GREATER STRENGTH
- 80% THICKER WALLS FOR GREATER CONDUCTIVITY AND STRENGTH

- EXCEED SAE CONDUCTIVITY STANDARDS
- MADE OF 100% COPPER, TIN PLATED
- TWICE AS THICK AS INDUSTRY STANDARDS
- CAN BE CRIMPED OR SOLDERED

P/N 17036

96

 WIRE GAUGE: 6 STUD SIZE: 1/4" COLOR: GRAY P/N 32216	 WIRE GAUGE: 4 STUD SIZE: 1/4" COLOR: GRAY P/N 32213	 WIRE GAUGE: 1-2 STUD SIZE: 5/16" COLOR: PINK P/N 32205	 WIRE GAUGE: 1/0 STUD SIZE: 5/16" COLOR: BLACK P/N 32202	 WIRE GAUGE: 2/0 STUD SIZE: 5/16" COLOR: ORANGE P/N 32208	 BATTERY CABLE STRIPPER P/N 8215
 WIRE GAUGE: 6 STUD SIZE: 5/16" COLOR: GRAY P/N 32217	 WIRE GAUGE: 4 STUD SIZE: 5/16" COLOR: GRAY P/N 32215	 WIRE GAUGE: 1-2 STUD SIZE: 3/8" COLOR: PINK P/N 32204	 WIRE GAUGE: 1/0 STUD SIZE: 3/8" COLOR: BLACK P/N 32201	 WIRE GAUGE: 2/0 STUD SIZE: 3/8" COLOR: ORANGE P/N 32207	
 WIRE GAUGE: 6 STUD SIZE: 3/8" COLOR: GRAY P/N 32218	 WIRE GAUGE: 4 STUD SIZE: 3/8" COLOR: GRAY P/N 32214	 WIRE GAUGE: 1-2 STUD SIZE: 1/2" COLOR: PINK P/N 32203	 WIRE GAUGE: 1/0 STUD SIZE: 1/2" COLOR: BLACK P/N 32200	 WIRE GAUGE: 2/0 STUD SIZE: 1/2" COLOR: ORANGE P/N 32206	
 WIRE GAUGE: 3/0 STUD SIZE: 3/8" COLOR: PURPLE P/N 32210	 WIRE GAUGE: 3/0 STUD SIZE: 1/2" COLOR: PURPLE P/N 32209	 WIRE GAUGE: 4/0 STUD SIZE: 3/8" COLOR: YELLOW P/N 32212	 WIRE GAUGE: 4/0 STUD SIZE: 1/2" COLOR: YELLOW P/N 32211	EXPANSION	

TRAY FRONT

CHROMATE INDUSTRIAL CORP. • 5250-A Naiman Parkway, Solon, OH 44139 • 1-800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

100109

A20-67



BATTERY MAINTENANCE KIT

FEATURES:

- Great battery maintenance kit for tow trucks, car lots, field repair, govt. motorpools, body shops, rental fleets, etc.
- All tools are top of the line quality (made in the USA)
- Has all the parts needed to service and change your battery
- This high quality maintenance kit will provide the professional technician many years of service

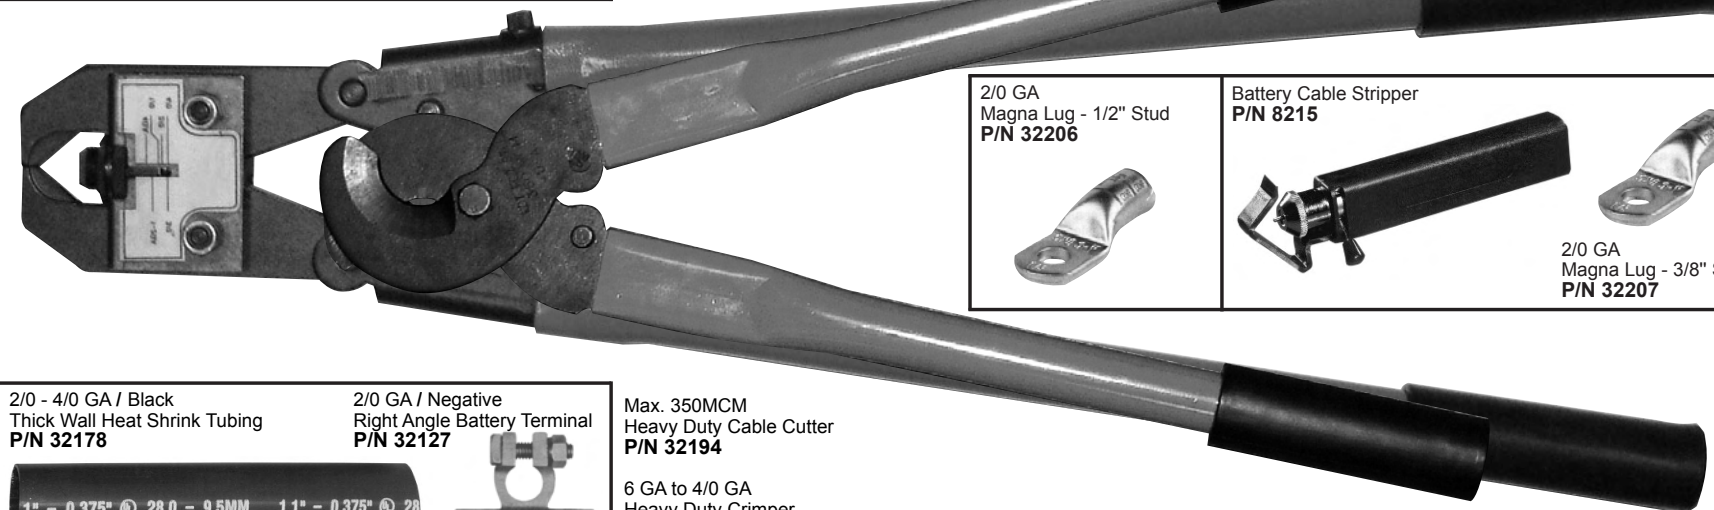

P/N 17035

20

2/0 - 4/0 GA / Red
Thick Wall Heat Shrink Tubing
P/N 32180




2/0 GA / Positive
Right Angle Battery Terminal
P/N 32128



2/0 GA
Magna Lug - 1/2" Stud
P/N 32206



Battery Cable Stripper
P/N 8215



2/0 GA
Magna Lug - 3/8" Stud
P/N 32207



2/0 GA / Negative
Straight Battery
Terminal
P/N 32117




2/0 GA / Positive
Straight Battery
Terminal
P/N 32118



2/0 - 4/0 GA / Black
Thick Wall Heat Shrink Tubing
P/N 32178



2/0 GA / Negative
Right Angle Battery Terminal
P/N 32127



Max. 350MCM
Heavy Duty Cable Cutter
P/N 32194

6 GA to 4/0 GA
Heavy Duty Crimper
P/N 32195

CHROMATE INDUSTRIAL CORP. • 5250-A NAIMAN PARKWAY, SOLON, OHIO 44139 • 1-800-BUY-BOLT • FAX: 631-567-2418 • www.chromate.com

100109

A20-68



FUSION SEAL ELECTRICAL WRAP ASSORTMENT

P/N 17042

- Features:**
- Long lasting electrode insulating wrap
 - Form fitting, extremely flexible
 - Superior protection in extreme temperatures and highly corrosive environments
 - Weather and saltwater resistant
 - Electrical insulation, splices, and cable harnesses
 - Economical substitute for heat shrink tubing and hot air ducting

 1" x 30 mil x 36 Feet Red P/N 2899	 1" x 30 mil x 36 Feet Black P/N 28991	EXPANSION
 1" x 30 mil x 36 Feet Gray P/N 28992	 1" x 30 mil x 36 Feet Clear P/N 28993	EXPANSION

TRAY FRONT

4

A20-69



GRIP TIES ASSORTMENT

FEATURES:

- Low profile, one piece fastening devices. Constructed of polyethylene hook and nylon loop, laminated back to back.
- Quick release for repetitive access to cable and wire. Can be opened and closed numerous times without failure.
- Reusable, adjustable, releasable and easy to install.
- Design provides ease of installation in tight areas such as telecommunications closets and will not get caught on other cables.
- Will not cause damage to Category 5e and Category 6 cable or fiber optic cable since it cannot be over-cinched.
- Minimum Tensile Strength: 40 lbs (6", 8", 11") / 50 lbs (15")

P/N 17041

102

6" x 1/2" / BLACK P/N 8034	8" x 1/2" / BLACK P/N 8035	11" x 1/2" / BLACK P/N 8036	15" x 3/4" / BLACK P/N 8037
6" x 1/2" / RED P/N 8040	8" x 1/2" / RED P/N 8041	11" x 1/2" / RED P/N 8042	15" x 3/4" / RED P/N 8043
6" x 1/2" / ORANGE P/N 8044	8" x 1/2" / ORANGE P/N 8045	11" x 1/2" / ORANGE P/N 8046	15" x 3/4" / ORANGE P/N 8047
6" x 1/2" / YELLOW P/N 8048	8" x 1/2" / YELLOW P/N 8049	11" x 1/2" / YELLOW P/N 8051	15" x 3/4" / YELLOW P/N 8052
6" x 1/2" / GREEN P/N 8053	8" x 1/2" / GREEN P/N 8055	11" x 1/2" / GREEN P/N 8057	15" x 3/4" / GREEN P/N 8059
6" x 1/2" / BLUE P/N 8061	8" x 1/2" / BLUE P/N 8063	11" x 1/2" / BLUE P/N 8065	15" x 3/4" / BLUE P/N 8066

TRAY FRONT

A20-70





MILITARY VEHICLE 24V BULB ASSORTMENT

FEATURES:




- Single and double contacts, index offset and bayonet inline prongs, double end cap and wedge base
- Voltage range from 12.8 to 28 volts
- Dual filament lamps
- Bulb life from 400 to 7,500 hours

SINGLE CONTACT (S.C.)




P/N 525515A

DOUBLE CONTACT (D.C.)




100


#1683 24V Single Contact Bayonet Bulb
P/N 516099




#1638 24V Double Contact Bayonet Bulb
P/N 516097



#1203 24V Single Contact Bayonet Bulb
P/N 516096




#198 Double Contact Index Bulb
P/N 28911




#3157 Park & Turn Mini-Bulb (Clear)
P/N 28941




#1141 Single Contact Bayonet Bulb
P/N 28926




#2057 Double Contact Index Bulb
P/N 28929




#97 Single Contact Bayonet Bulb
P/N 28910



#757 24V Miniature Bayonet Bulb
P/N 516095



#624 24V Double Contact Bayonet Bulb
P/N 516094



A20-71

TRAY FRONT






BUTT CONNECTOR ASSORTMENT

FEATURES:

- Double crimp holds both wire & insulation for superior strength.
- Funnel design for fast, positive wire insertion.
- Deep "V" groove and long barrel for extra strong grip & maximum current flow.
- High temperature nylon insulation.

P/N 17075



 22-18 / RED STRIPES LENGTH: 1.5" P/N 2924	 22-18 DOUBLE GRIP P/N 2750	 22-18 RED / MOISTURE RESISTANT P/N 2063	 20-18 BUTT CONNECTOR P/N 2841	 18-20 CSS – CRIMP-SOLDER-SEAL P/N 21738	 22-18 COOL SEAL BUTT CONNECTOR P/N 2652
 16-14 / BLUE STRIPES LENGTH: 1.5" P/N 2925	 16-14 DOUBLE GRIP P/N 2760	 16-14 BLUE / MOISTURE RESISTANT P/N 2062	 16-14 BUTT CONNECTOR P/N 2842	 14-16 CSS – CRIMP-SOLDER-SEAL P/N 21739	 16-14 COOL SEAL BUTT CONNECTOR P/N 2653
 12-10 / YELLOW STRIPES LENGTH: 1.625" P/N 2926	 12-10 DOUBLE GRIP P/N 2770	 12-10 YELLOW / MOISTURE RESISTANT P/N 2061	 12-10 BUTT CONNECTOR P/N 2843	 10-12 CSS – CRIMP-SOLDER-SEAL P/N 21740	 12-10 COOL SEAL BUTT CONNECTOR P/N 2654
 22-18 to 16-14 REDUCING BUTT CONNECTOR P/N 2077	 16-14 to 12-10 REDUCING BUTT CONNECTOR P/N 2078	 24-22 HEAT SHRINK MULTI WIRE IN-LINE CONNECTOR P/N 21616	 20-18 HEAT SHRINK MULTI WIRE IN-LINE CONNECTOR P/N 21617	 16-14 HEAT SHRINK MULTI WIRE IN-LINE CONNECTOR P/N 21618	 12-10 HEAT SHRINK MULTI WIRE IN-LINE CONNECTOR P/N 21619

TRAY FRONT



3M™ PROFESSIONAL GRADE ELECTRICAL TAPE

FEATURES

- Outstanding electrical and mechanical properties make this tape excellent for use in phase identification, and color coding of motor leads and piping systems.
- Insulate splices up to 600V
- 7 mil (0.178 mm) polyvinyl chloride (PVC) color-coding tape
- Abrasion and weather-resistant









- Resists UV rays, abrasion, corrosion, alkalis and acids
- Flame retardant
- UL Listed and CSA certified
- Also useful for marking safety areas

P/N 17077



18

A20-73

  3/4" x 66' BLUE P/N 28750	  3/4" x 66' GREEN P/N 28753	  3/4" x 66' VIOLET P/N 28756	  3/4" x 66' WHITE P/N 28757
  3/4" x 66' BROWN P/N 28751	  3/4" x 66' ORANGE P/N 28754	  3/4" x 66' RED P/N 28755	  3/4" x 66' YELLOW P/N 28758
  3/4" x 66' GRAY P/N 28752			

TRAY FRONT



MOUNTABLE CABLE TIES


FEATURES

- Three high quality cable ties: 3/8" x 8", 3/8" x 11", 3/8" x 14"
- Bundle, mount and hang: Cords, ropes, hoses, cables, wire, tarps, etc.
- 90 pound tensile strength
- Multiple mounting positions
- UV resistant


P/N 17663



150



3/8" x 8"
2" max. Bundle
P/N 8094




3/8" x 8"
2" max. Bundle
P/N 8094



3/8" x 11"
3" max. Bundle
P/N 8095



3/8" x 11"
3" max. Bundle
P/N 8095



3/8" x 14"
4" max. Bundle
P/N 8096



3/8" x 14"
4" max. Bundle
P/N 8096



A20-74

TRAY FRONT

CHROMATE INDUSTRIAL CORP. • 5250-A NAIMAN PARKWAY, SOLON, OH 44139 • 1-888-567-2200 • FAX: 631-567-2418 • www.chromate.com

090115